


Architectural Grade

Job Name _____

Type _____

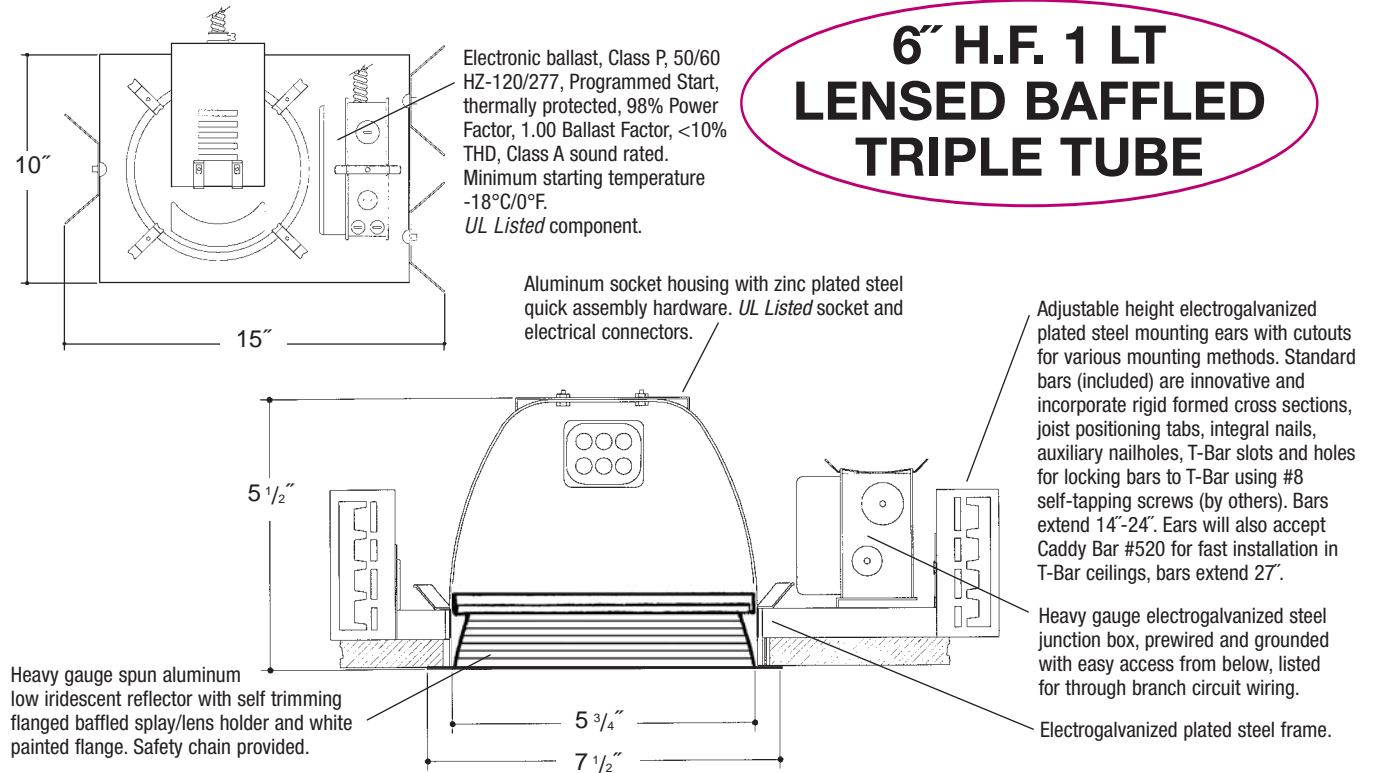

6" H.F. 1 LT LENSED BAFFLED TRIPLE TUBE

Rough in Kit – 6" Horizontal Fluorescent 1-Lamp (Compact Fluorescent Triple Tube)

Catalog Number **A6HF1**

A6HF1

Wattage	Ballast	Voltage	Options
42W MAX. PLT	E	1	EM
32W PLT	DA	2	F
26W PLT	DL	3	R
18W PLT		4	PR

Ballast		
E	Electronic	(4 Pin Lamp)
DA	Dimming - Advance Mark X	(4 Pin Lamp)
DL	Dimming - Lutron	(4 Pin Lamp)
Voltage		
1	120 Volts	
2	277 Volts	
3	347 Volts (Electronic Ballast only)	
4	208 Volt	
Options ▲		
EM	Emergency Battery	
F	Fused	
R	Remodeler	
PR	Plaster Ring	

Electronic Multi-Tap Ballast 120V Thru 277V Factory Standard

Finishing Kit – 6" Horizontal Fluorescent Lensed Reflector – clear reflector standard with White or Black Baffled Splay

Catalog Number **66**

66

Lens	Finish	Options
6621 - Tempered Clear Lens	SCL/BL	WL
6624 - Tempered Prismatic Lens (C73 Pattern)	SCL/WH	
6626 - Fresnel Lens	WHT/WH	
6628 - Flat Alba Lens	WHT/BL	
6629 - Drop Opal Lens		

Finish (Factory Standard)

SCL/BL	Specular Clear "Alzak" with Black Baffled Splay
SCL/WH	Specular Clear "Alzak" with White Baffled Splay
WHT/WH	White Reflector with White Baffled Splay
WHT/BL	White Reflector with Black Baffled Splay

Options ▲

WL	Sealed Lens and Gasketed Flange
-----------	---------------------------------

Features


Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374
voice (860) 564.4512 fax (860) 564.4854
www.vantageitg.com

06/07