


Job Name _____

Type _____

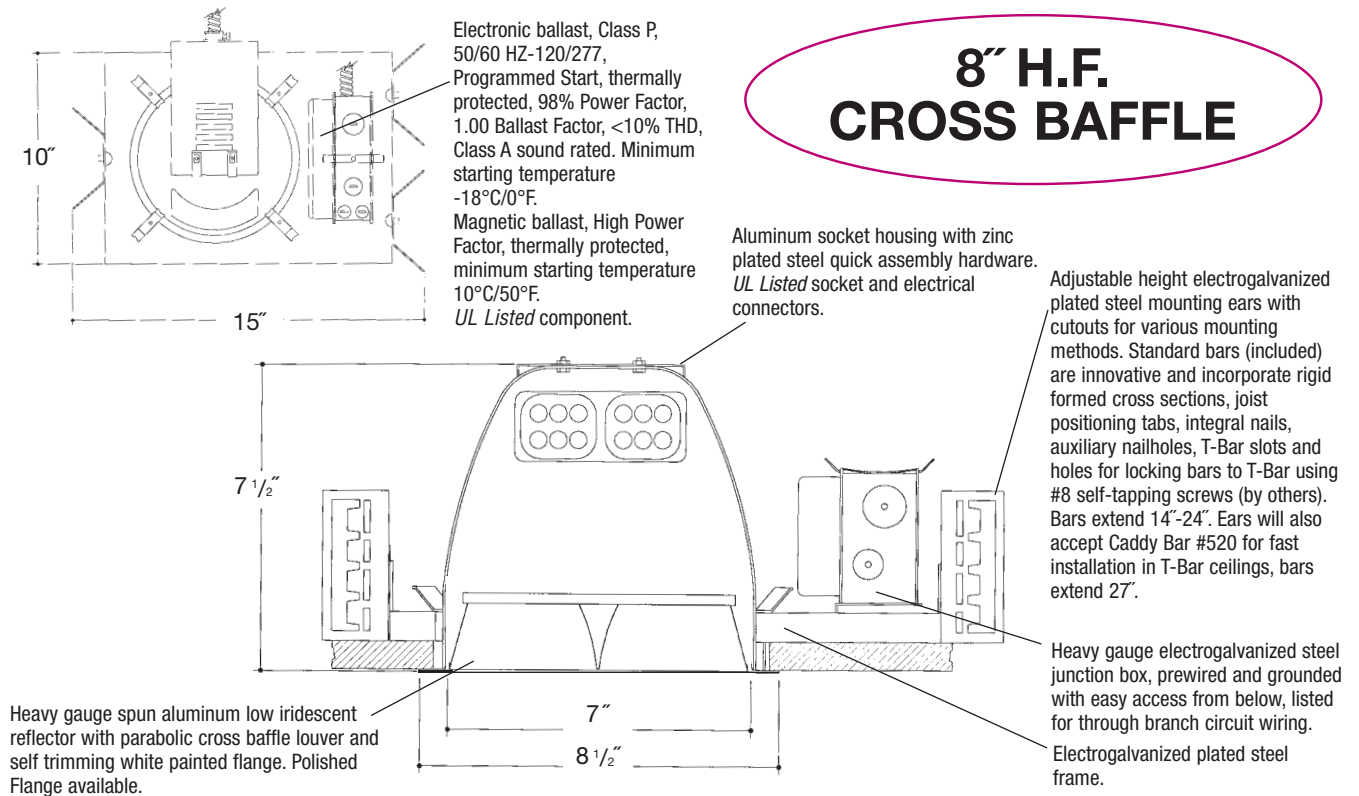

**8" H.F.
CROSS BAFFLE**

Rough in Kit – 8" Horizontal Fluorescent 2-Lamp (Compact Fluorescent Triple, Quad or Twin Tube)

Catalog Number **A8HF2**

A8HF2	Wattage	Ballast	Voltage	Options
	42W MAX. PLT	E	1	EM
	32W PLT	H	2	F
	26W DTT, PLT	DA	3	R
	18W DTT, PLT	DL	4	PR
	13"W TT, DTT			

- Ballast**
- E** Electronic (4 Pin Lamp)
 - H** High Power Factor (2 Pin Lamp)
 - DA** Dimming - Advance Mark X (4 Pin Lamp)
 - DL** Dimming - Lutron (4 Pin Lamp)
 - *** 13 Watt Advance Mark VII Only
- Voltage**
- 1** 120 Volts
 - 2** 277 Volts
 - 3** 347 Volts (Electronic Ballast only)
 - 4** 208 Volts (Electronic Ballast only)
- Options ▲**
- EM** Emergency Battery
 - F** Fused
 - R** Remodeler
 - PR** Plaster Ring

••1-Lamp only for 26W, 32W and 42W Triple Tube
 1-Lamp – Replace **A8HF2** with **A8HF1**
 Electronic Multi-Tap Ballast 120V Thru 277V Factory Standard

Finishing Kit – 8" Horizontal Fluorescent Parabolic Cross Baffle

Catalog Number **8665**

8665	Finish	Options
	SCL	PF
	SGO	
	WHT	

- Finish (Factory Standard)**
- SCL** Specular Clear "Alzak" with White Flange
 - SGO** Specular Gold "Alzak" with White Flange
 - WHT** White Reflector with White Flange
- Options ▲**
- PF** High Polished Flange

Consult Factory For Lens Options

Features


Manufactured and Listed to UL 1598, ETL and CSA standards.
 Suitable for Damp Locations
 Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374
 voice (860) 564.4512 fax (860) 564.4854
 www.vantageitg.com

06/07