


Architectural Grade

Job Name _____

Type _____

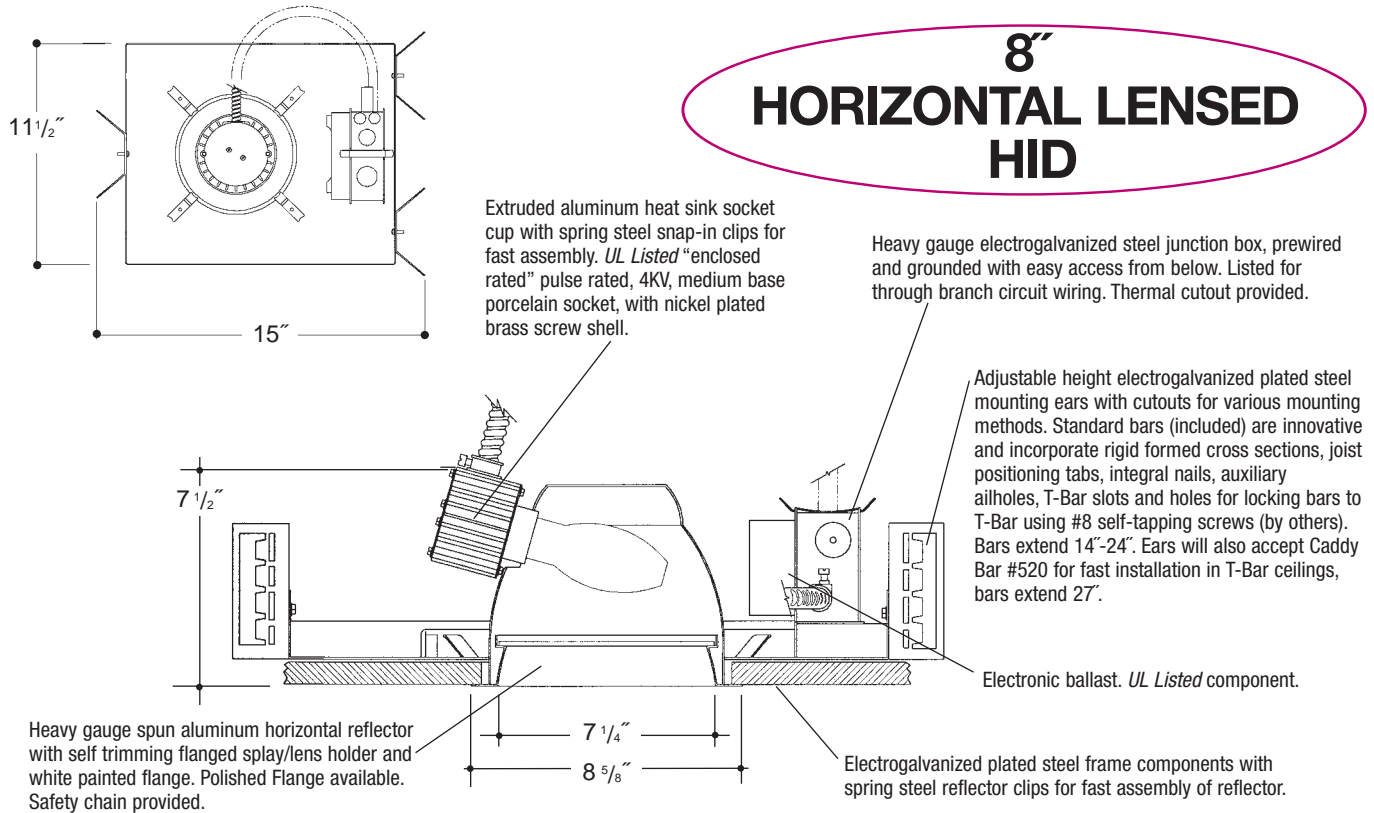

Rough in Kit – 8" Horizontal HID (ED17 Enclosed Rated* Lamp). *Note: 'Enclosed Fixture Rated' lamp must be used.

Catalog Number **A8MHE-HOR** _____

A8MHE-HOR	Wattage	Ballast	Voltage	Options
	150W MAX. ED17	H◆	1	QS
	100W ED17	E	2	QR
	70W ED17		3*	PR
	50W ED17		4	R
	35W ED17			F

Ballast	
H◆	Encased & Potted "F" Can
E	Electronic
Voltage	
1	120 Volts
2	277 Volts
3*	347 Volts
4	208 Volts
Options ▲	
QS	Quartz Socket
QR	Quartz Restrike
PR	Plaster Ring
R	Remodeler
F	Fused

HPS – Replace **A8MHE-HOR** with **HPS-A8HPSE-HOR**

* – 347V frame size - 14 1/2" x 17 3/4"

◆ – "F" Can Ballast available only in 150W: frame size – 16 3/4" x 17 3/4"

Finishing Kit – 8" Horizontal HID Lensed Reflector - clear reflector standard with White Splay and self trim flange

Catalog Number **86** _____

86	Lens	Finish	Options
	8661 - Tempered Clear Lens	SCL	PF
	8664 - Tempered Prismatic Lens (C73 Pattern)	SGO	WL
	8666 - Fresnel Lens	WHT	

Finish (Factory Standard)

SCL	Specular Clear "Alzak" Splay with White Flange
SGO	Specular Gold "Alzak" Splay with White Flange
WHT	White Splay with White Flange

Options ▲

PF	High Polished Flange
WL	Sealed Lens and Gasketed Flange

Features


Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374
voice (860) 564.4512 fax (860) 564.4854
www.vantageitg.com

06/07