

# Architectural Pendants


Job Name \_\_\_\_\_

Type \_\_\_\_\_

Pendant – P – Stem mount accepts slope ceilings with a 45° swivel adjustment. Factory Standard stem length is 12".  
**CK** – Cord and Canopy Kit. Factory standard cord length is 72".  
**CCK** – Cord and Cable Kit. Factory standard cord length is 72".  
**CCCK** – Coiled Cord and Cable Kit. Factory standard cord length is 72".

Specify all lengths and Color; White (WHT) or Black (BLK).

Incandescent BR40, PAR38, A23, A21, Medium Base.

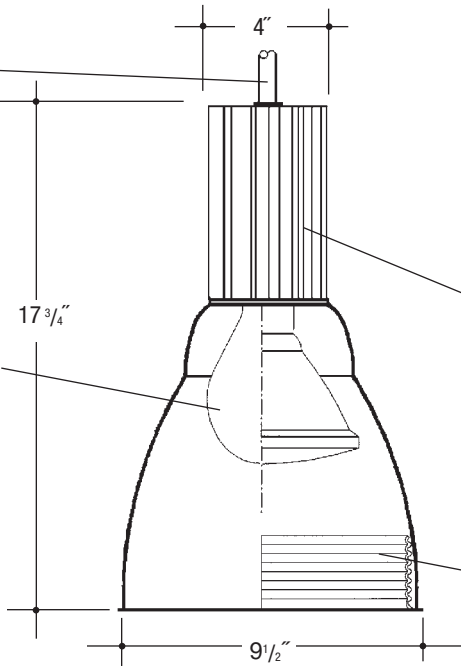

**10" INCANDESCENT ALUMINUM DecoBay**

Extruded aluminum 'Finned' heat dissipating housing. (CS - Camero Silver color standard)

Heavy gauge spun aluminum reflector with Specular Clear "Alzak" finish or multi-groove baffle. (Exterior color CS - Camero Silver standard.)

## DecoBay – 10" Incandescent Pendant Mounted Spun Aluminum Reflector (300W BR40; 250W PAR38; 200W A23; 150W A21).

Catalog Number **AGVDB10INC**

	Wattage	Voltage	Reflector Finish	Mounting	Color	Options
<b>AGVDB10INC</b>	300W MAX. BR40 250W PAR38, A38 200W A23 150W A21	120	SCL SCL/BL	P- _____ CK- _____ CCK- _____ CCCK- _____	WHT BLK BZ CS CC	DD-03

### Specifications

**Housing** – Extruded aluminum 'Finned', vented for proper ballast operating temperature. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS) (Standard), Custom Color (CC).

**Socket** – UL Listed medium base porcelain socket, with nickel plated brass screw shell.

**Lamp** – Incandescent A23, A21, PAR38, PAR30, Medium Base.

**Reflector** – Heavy gauge, high purity, specular clear "Alzak", spun aluminum.

**Pendant – P** – Stem mount accepts slope ceilings with a 45° swivel adjustment. Factory Standard stem length is 12". **CK** – Cord and Canopy Kit. Factory standard cord length is 72". **CCK** – Cord and Cable Kit. Factory standard cord length is 72".

**CCCK** – Coiled Cord and Cable Kit. Factory standard cord length is 72". Specify all lengths and Color; White (WHT) or Black (BLK).

### Voltage

1 120 Volt

### Reflector Finish ▲

SCL Specular Clear "Alzak"  
SCL/BL Specular Clear "Alzak" and Black Baffle

### Mounting ▲

P – 3/8" Stem and Swivel Canopy Kit. (Specify stem length-WHT/BLK).  
 CK – Cord and Canopy Kit. (Specify cord length-WHT/BLK).  
 CCK – Cord and Cable Kit. (Specify cord and cable length-WHT/BLK).  
 CCCK – Coiled Cord and Cable Kit. (Specify coiled cord and cable length-WHT/BLK).

### Color

WHT White  
 BLK Black  
 BZ Bronze  
 CS Camero Silver (Standard)  
 CC Custom Color

### Options ▲

DD-03 DecoDisc

### Features


Manufactured and Listed to UL 1598, ETL and CSA standards.  
 Suitable for Damp Locations  
 Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



76 Community Avenue Plainfield, CT 06374  
 voice (860) 564.4512 fax (860) 564.4854  
 www.vantageitg.com

07/07

Luminaires