

VANTAGE LIGHTING LOWBAYS AND HIGHBAYS

Vantage Lighting's LowBays and HighBays utilize high lumen, compact fluorescent lamps making it highly efficient for warehouses, educational, retail, commercial and industrial applications.

Housing

- Hand spun aluminum, round ballast housing. Aluminum heat dissipating socket plate ballast mounts dissipate heat generated from multiple lamp applications.

Ballast

- Cold Temp. start Electronic 50/60 Hz, Multi-Volt 120 thru 277 Ballast. Each ballast mounts to its own heatsink to eliminate ballast overheating. Advance Mark X dimming available in all wattages.

Reflector

- Heavy gauge, high purity, spun aluminum. Polyester powdercoat finish.

Refractor By Reflexor® by LEXALITE®

- Spectrus Lexalite® prismatic refractor provides excellent efficiency, upright component gives the illuminated space lower contrast and better uniformity. Lexan refractor provides more rugged performance in an abusive environment.

New!
Now Available with
Induction Lamp.
Consult Factory.



76 Community Avenue
Plainfield, CT 06374
voice (860) 564.4512
fax (860) 564.4854
www.vantageltg.com



Features

Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations.

Wet location under covered ceiling.

VANTAGE LIGHTING

LOWBAYS AND HIGHBAYS ORDERING DATA

Features

- All highbays are manufactured with a 3/4" mounting stem that attaches to a die cast swivel canopy adjustable up to 45°
- The ballast housing ships standard with a polyester powder coat and 1/2" vent holes located on the top of the housing for heat dissipation.
- Standard colors: White, Black, Silver and Bronze.
- Custom colors available for the ballast housing and aluminum dome.

Dome	Size	Series	Lamp	Wattage	Ballast	Finish	Options
AGV - Aluminum	12	LB	1	18	E1/2 - Electronic 120-277 Volt	WHT	BL - Flat, Bottom Clear Lens
PGV - Prismatic	16	HB	2	26	DA1 - Advance Mark X 120V Ballast	BLK	CL - Conical Prismatic Acrylic Lens
LGV - Lexan	22	HB	4	32	DA2 - Advance Mark X 277V Ballast	CS	DL - Drop Prismatic Acrylic Lens (22" Only)
		HB	6	42		BZ	REM - Remote Emergency Battery
			8	57**			WG - Wireguard
			9	70***			FWG - Full Wireguard (22" Only)
			HB22" Only				H - Hook Mounting Option
							HC - Hook and Cord
							HCP - Hook, Cord and Plug
							SC - Safety Cable

** 57W available in a 22" shade and a 6 light application only.

*** 70W available in a 22" shade and a 4 light application only.




22" 8-Lamp Compact Fluorescent High Bay, Multiple Switch Legs, Full Wire Guard

Pendant mounted 22" 8-Lamp 42 Watt Triple Tube High Bay. Multiple switch legs with Advance Mark X dimming ballasts. Prismatic refractor with drop prismatic lens and full wire guard.

Fixture Number: PGM22HB842-4-DAX-WHT-DL-FWG




Acrylic Dome
w/Full Body
Wireguard

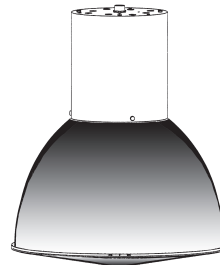


Aluminum Dome
with Conical Lens

Photometric

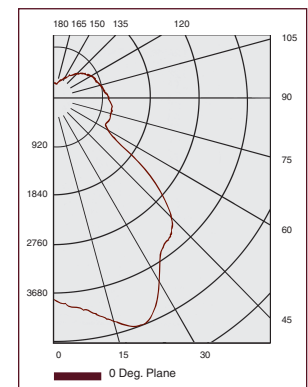

8x42W CF with 22" Acrylic Dome
LTL Test Number: 07021
Part Number: PGM22HB842-E1/2

Cone of Light

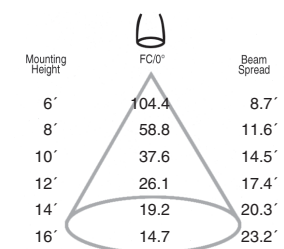

Total Fixture Efficiency: 73.7%