



HANGER BARS

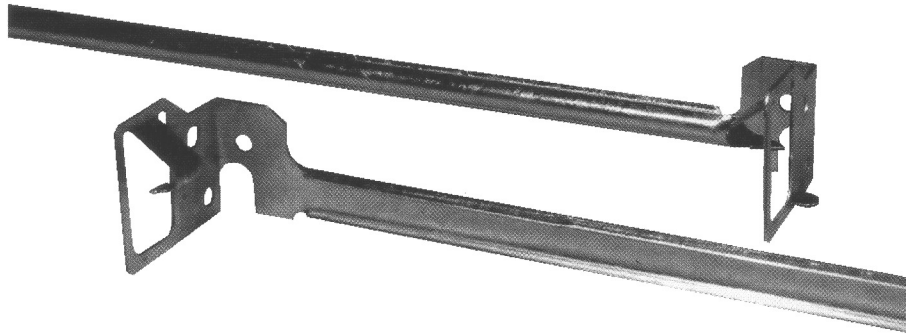

Features include:

1. Mechanical interference to prevent them from slipping apart, yet if necessary, this can be overcome with a solid tug.
2. Formed cross sections offer superior rigidity.
3. Contains small outward extending tabs for positioning flush with underside of joists.
4. Contains integral nails, which are:
 - located as far away as possible from the main bar to permit easy nailing.
 - oriented parallel to joist wood grain for easier installation.
 - toothed to resist pullout.
 - the sharpest available achieved through a proprietary process.
 - retracted and surrounded for added safety prior to installation.
5. Contains auxiliary nailing hole for added retention, also located far from the main bar to permit easy nailing.
6. Contains slots for engagement with suspended ceiling T-bar, whose depth lets the plaster frame sit flush with the underside of ceiling panels.
7. Contains hole for locking hangers to T-bar using #8 self-tapping screw.
8. Contains second auxiliary face nailing hole for transverse or other unusual mounting orientations.
9. Extendable from 14" to 24" centers.

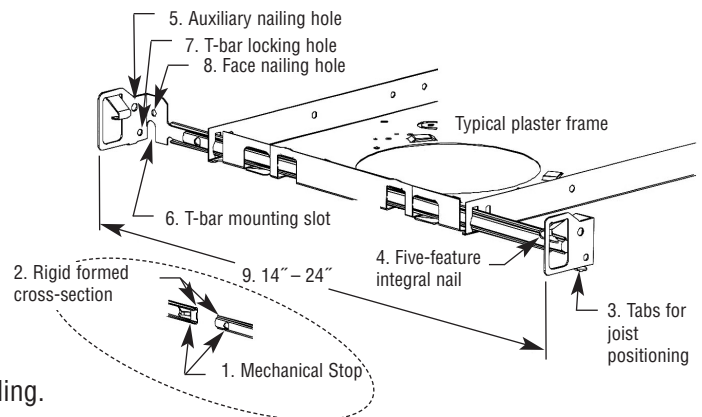

▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.