


Architectural Grade


Job Name _____

Type _____

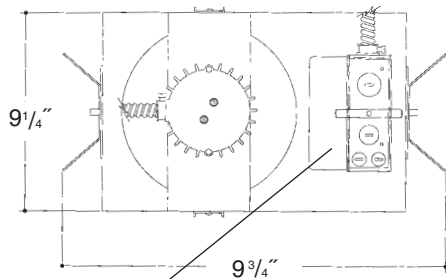

**4" V.F. 1 LT
OPEN BAFFLED**

Electronic ballast, Class P, 50/60 HZ-120/277, Programmed Start, thermally protected, 98% Power Factor, 1.00 Ballast Factor, <10% THD, Class A sound rated. Minimum starting temperature -18°C/0°F. Magnetic ballast, High Power Factor, thermally protected, minimum starting temperature 10°C/50°F. *UL Listed* component.

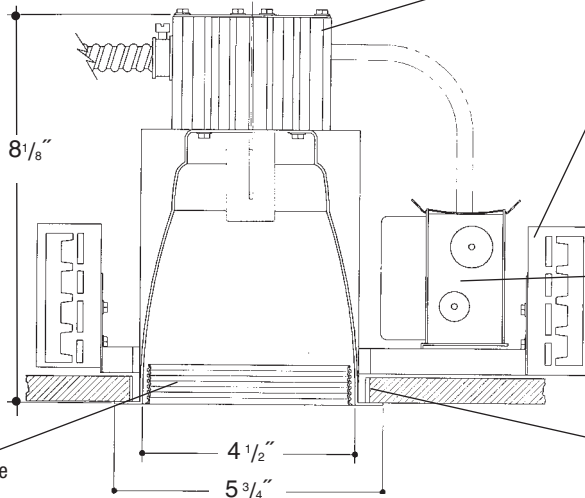

Aluminum heat sink socket cup with Zinc plated steel hardware and spring steel clips for fast assembly. *UL Listed* socket.

Adjustable height electrogalvanized plated steel mounting ears with cutouts for various mounting methods. Standard bars (included) are innovative and incorporate rigid formed cross sections, joint positioning tabs, integral nails, auxiliary nailholes, T-Bar slots and holes for locking bars to T-Bar using #8 self-tapping screws (by others). Bars extend 14"-24". Ears will also accept Caddy Bar #520 for fast installation in T-Bar ceilings, bars extend 27".

Heavy gauge electrogalvanized steel junction box, prewired and grounded with easy access from below, listed for through branch circuit wiring.

Heavy gauge spun aluminum low iridescent reflector with self trimming white painted flange. Keyslots to secure reflector. Polished Flange available.

Aluminum frame with Integral Plaster Ring.

Rough in Kit – 4" Vertical Fluorescent 1-Lamp (Compact Fluorescent Quad Tube)

Catalog Number **A4VF1**

| A4VF1 | Wattage | Ballast | Voltage | Options |
|-------|--------------------------|--------------------|------------------|---------|
| | 18W MAX. DTT 13"W DTT | E H DA DL | 1 2 3 4 | EM F |

| | | |
|------------------|-------------------------------------|--------------|
| Ballast | | |
| E | Electronic | (4 Pin Lamp) |
| H | High Power Factor | (2 Pin Lamp) |
| DA | Dimming - Advance Mark X | (4 Pin Lamp) |
| DL | Dimming - Lutron | (4 Pin Lamp) |
| * | 13W Advance Mark VII Only | |
| Voltage | | |
| 1 | 120 Volts | |
| 2 | 277 Volts | |
| 3 | 347 Volts (Electronic Ballast Only) | |
| 4 | 208 Volts (Electronic Ballast Only) | |
| Options ▲ | | |
| EM | Emergency Battery | |
| F | Fused | |

Electronic Multi-Tap Ballast 120V Thru 277V Factory Standard

Finishing Kit – 4" Vertical Fluorescent Open Baffled Reflector

Catalog Number **4150**

| 4150 | Finish | Options |
|------|--|-----------|
| | SCL/BL SGO/BL SCL/WH SGO/WH WHT/WH | PF GSK |

Finish (Factory Standard)

| | |
|---------------|---|
| SCL/BL | Specular Clear "Alzak" with White Flange and Black Baffle |
| SGO/BL | Specular Gold "Alzak" with White Flange and Black Baffle |
| SCL/WH | Specular Clear "Alzak" with White Flange and White Baffle |
| SGO/WH | Specular Gold "Alzak" with White Flange and White Baffle |
| WHT/WH | White Reflector with White Flange and White Baffle |

Options ▲

| | |
|------------|--------------------------------|
| PF | High Polished Flange |
| GSK | Neoprene Foam Single Gasketing |

Features


Manufactured and Listed to UL 1598, ETL and CSA standards. Suitable for Damp Locations Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374
voice (860)564.4512 fax (860)564.4854
www.vantageitg.com

06/07