


Architectural Grade

Job Name _____

Type _____

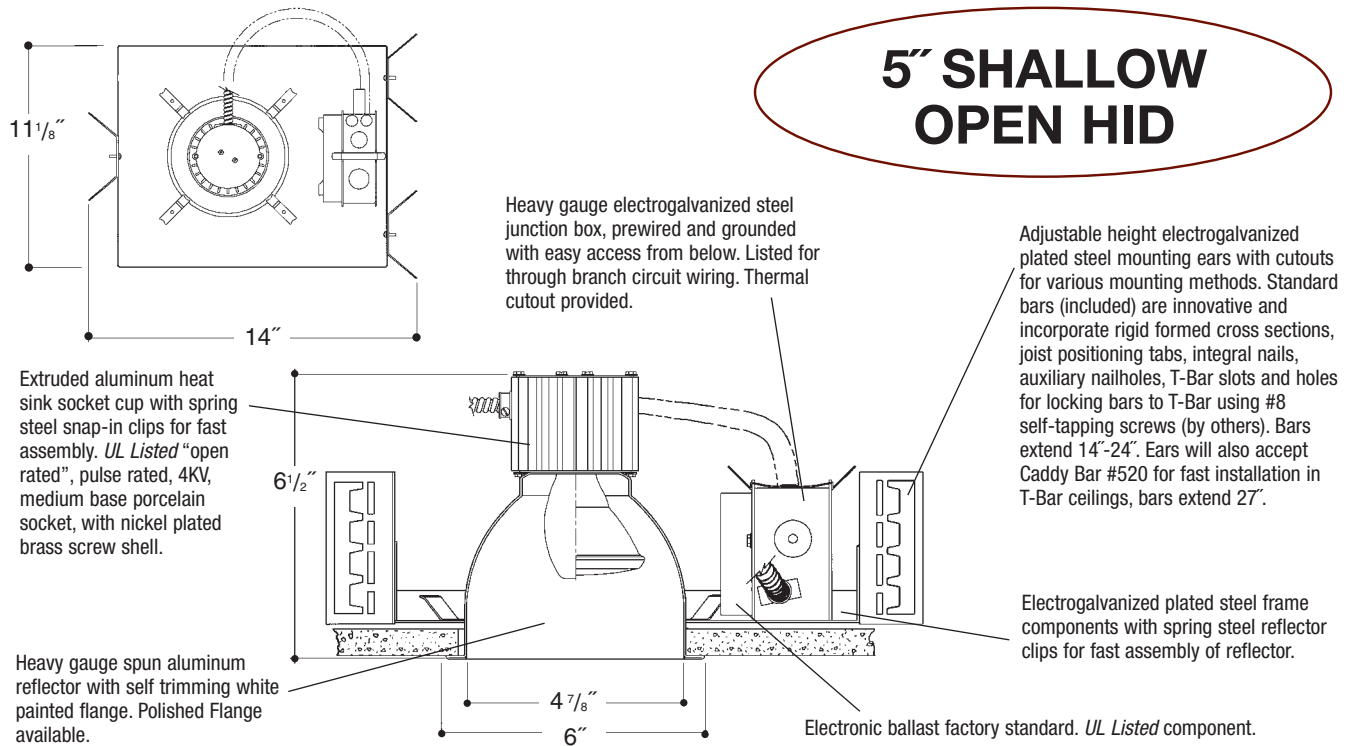

Rough In Kit – 5" HID (ED17; PAR20; PAR30 Open Rated* Lamps) *Note: 'Open Fixture Rated' lamp must be used.

Catalog Number **A5MHO**

A5MHO	Wattage	Ballast	Voltage	Options	Ballast E Voltage	Electronic
70W MAX. PAR30, ED17		E	1		1	120 Volts
50W PAR30, ED17			2		2	277 Volts
39W PAR20, PAR30			4		4	208 Volts
35W ED17					Options ▲	

PAR Lamp – Add P – PA5MHO

Finishing Kit – 5" HID Open Reflector

Catalog Number **5300**

5300	Finish	Options	Finish (Factory Standard)
	SCL	PF	SCL Specular Clear "Alzak" with White Flange
	SGO	GSK	SGO Specular Gold "Alzak" with White Flange
	WHT		WHT White Reflector with White Flange
			Options ▲
			PF High Polished Flange
			GSK Neoprene Foam Single Gasketing

Features

Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

76 Community Avenue Plainfield, CT 06374
voice (860)564.4512 fax (860)564.4854
www.vantageitg.com

03/10

