


Architectural Grade

Job Name _____

Type _____

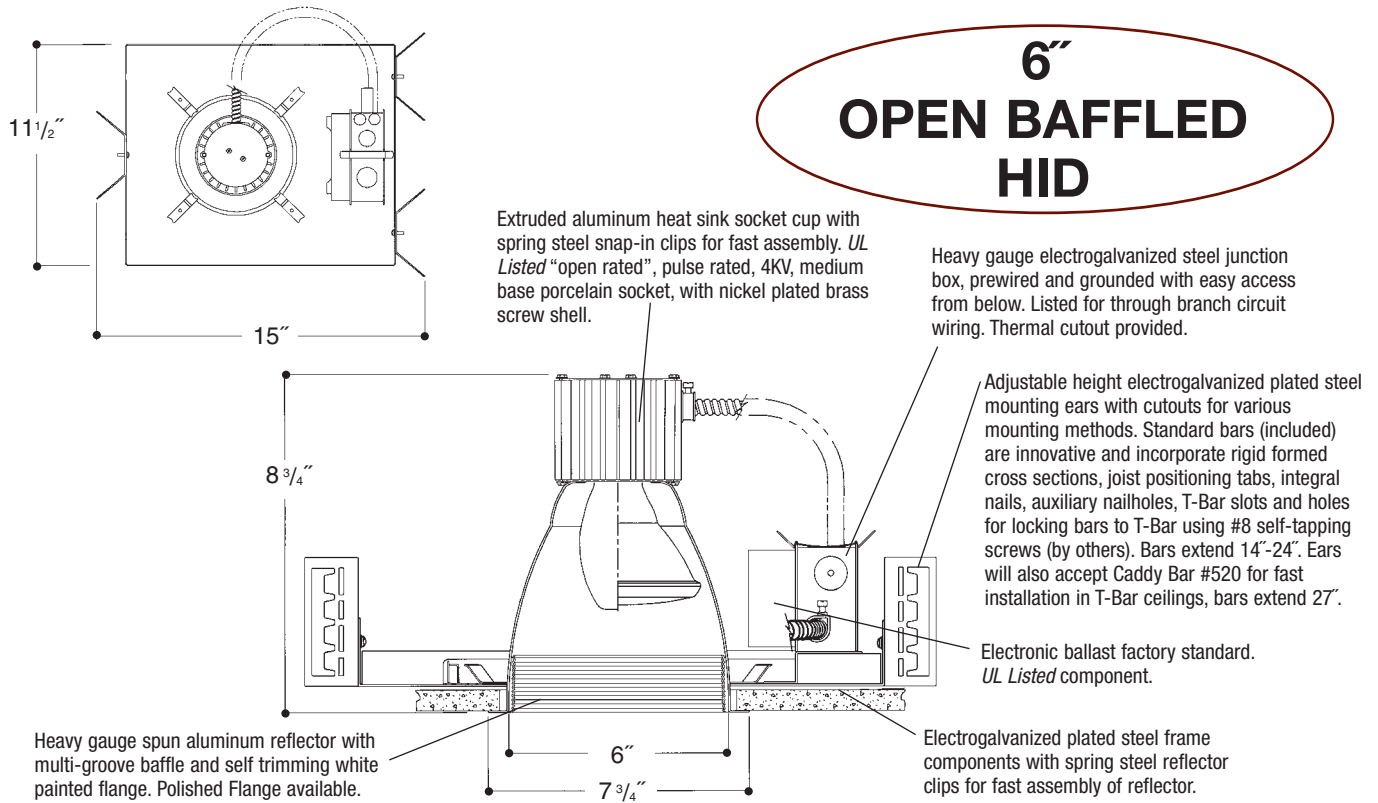

Rough in Kit – 6" HID (ED17; PAR30; PAR38 Open Rated* Lamps). *Note: 'Open Fixture Rated' lamp must be used.

Catalog Number **A6MHO**

A6MHO	Wattage	Ballast	Voltage	Options
	100W MAX. ED17, PAR38	H	1	QS
	70W ED17, PAR30	E	2	QR
	50W ED17		3*	PR
	39W PAR20, PAR30		4	R
	35W ED17			F

- Ballast
H Encased & Potted "F" Can
E Electronic
- Voltage
1 120 Volts
2 277 Volts
3* 347 Volts
4 208 Volts
- Options ▲
QS Quartz Socket
QR Quartz Restrike
PR Plaster Ring
R Remodeler
F Fused

PAR Lamp – Replace **A6MHO** with **PA6MHO**

HPS* – Replace **A6MHO** with **A6HPSO**

* – HPS and 347V frame size - 14 1/2" x 17 3/4"

Finishing Kit – 6" HID Open Baffled Reflector

Catalog Number **6450**

6450	Finish	Options
	SCL/BL	PF
	SGO/BL	GSK
	SCL/WH	
	SGO/WH	
	WHT/WH	
	WHT/BL	

Finish (Factory Standard)

- SCL/BL** Specular Clear "Alzak" with White Flange and Black Baffle
SGO/BL Specular Gold "Alzak" with White Flange and Black Baffle
SCL/WH Specular Clear "Alzak" with White Flange and White Baffle
SGO/WH Specular Gold "Alzak" with White Flange and White Baffle
WHT/WH White Reflector with White Flange and White Baffle
WHT/BL White Reflector with White Flange and Black Baffle

Options ▲

- PF** High Polished Flange
GSK Neoprene Foam Single Gasketing

Features


Manufactured and Listed to UL 1598, ETL and CSA standards.
 Suitable for Damp Locations
 Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires