


Architectural Grade

Job Name _____

Type _____

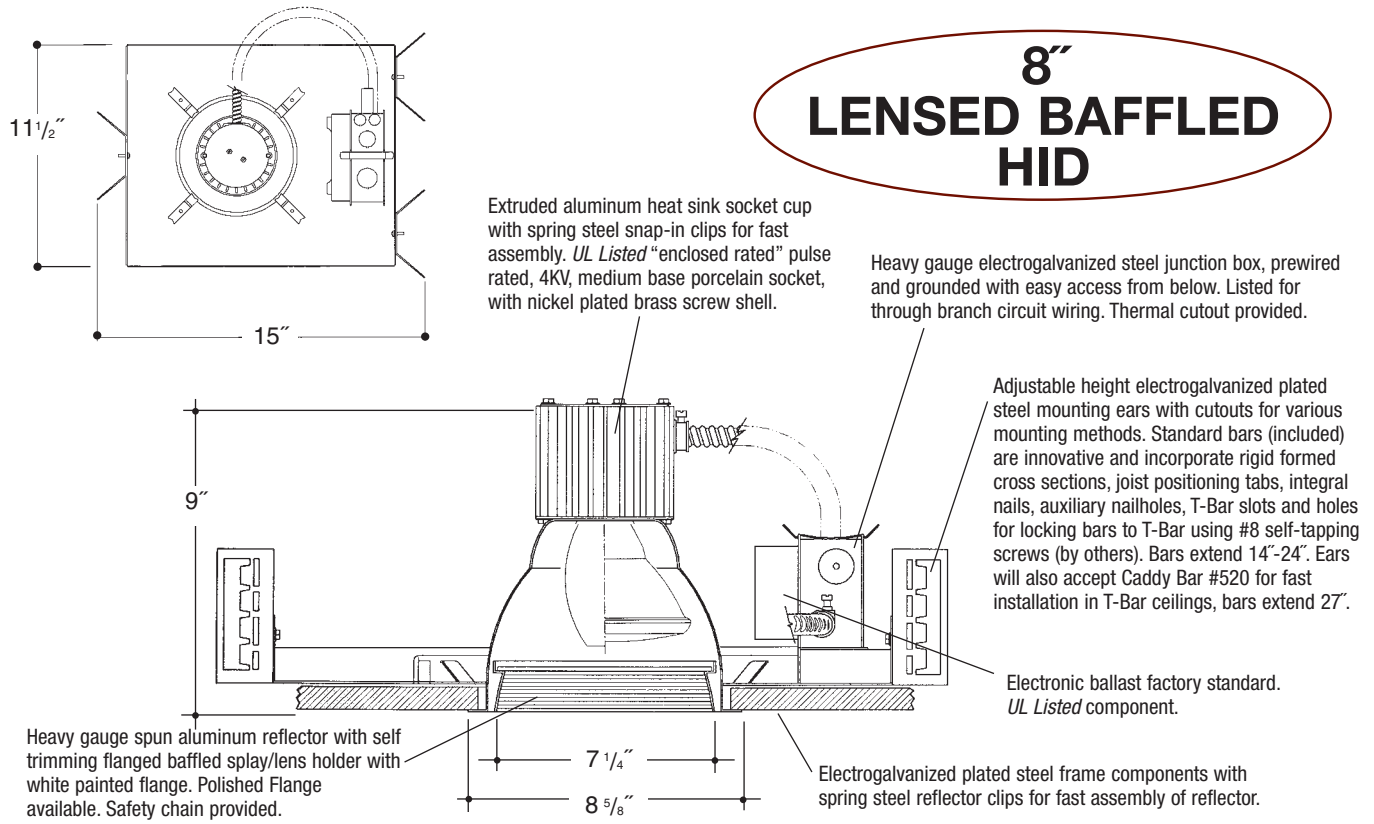

Rough in Kit – 8" HID (ED17; PAR20; PAR30; PAR38 Enclosed Rated* Lamp). **Note:* 'Enclosed Fixture Rated' lamp must be used.

Catalog Number **A8MHE**

A8MHE	Wattage	Ballast	Voltage	Options
150W MAX. PAR38, ED17		H♦	1	QS
100W PAR38, ED17		E	2	QR
70W PAR30, PAR38, ED17			3*	PR
50W PAR30 ED17			4	R
39W PAR20, PAR30				F
35W ED17				

Ballast	
H♦	Encased & Potted "F" Can
E	Electronic
Voltage	
1	120 Volts
2	277 Volts
3*	347 Volts
4	208 Volts
Options ▲	
QS	Quartz Socket
QR	Quartz Restrike
PR	Plaster Ring
R	Remodeler
F	Fused

PAR Lamp – Replace **A8MHE** with **PA8MHE**

HPS – Replace **A8MHE** with **A8HPSE**

* – 347V frame size – 14 1/2" x 17 3/4"

♦ – "F" Can Ballast available only in 150W: frame size – 16 3/4" x 17 3/4"

Finishing Kit – 8" HID Lensed Reflector - clear reflector standard with Black or White Baffled Splay

Catalog Number **84**

84	Lens	Finish	Options
8421 - Tempered Clear Lens		SCL/BL	PF
8424 - Tempered Prismatic Lens (C73 Pattern)		SCL/WH	DGSK
8426 - Fresnel Lens		WHT/WH	
		WHT/BL	

Finish (Factory Standard)

SCL/BL	Specular Clear "Alzak" with Black Baffled Splay
SCL/WH	Specular Clear "Alzak" with White Baffled Splay
WHT/WH	White Reflector with White Baffled Splay
WHT/BL	White Reflector with Black Baffled Splay

Options ▲

PF	High Polished Flange
DGSK	Neoprene Foam Double Gasketing

Features


Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



76 Community Avenue Plainfield, CT 06374

voice (860)564.4512 fax (860)564.4854

www.vantageitg.com

03/10

Luminaires