


# Architectural Grade

Job Name \_\_\_\_\_

Type \_\_\_\_\_

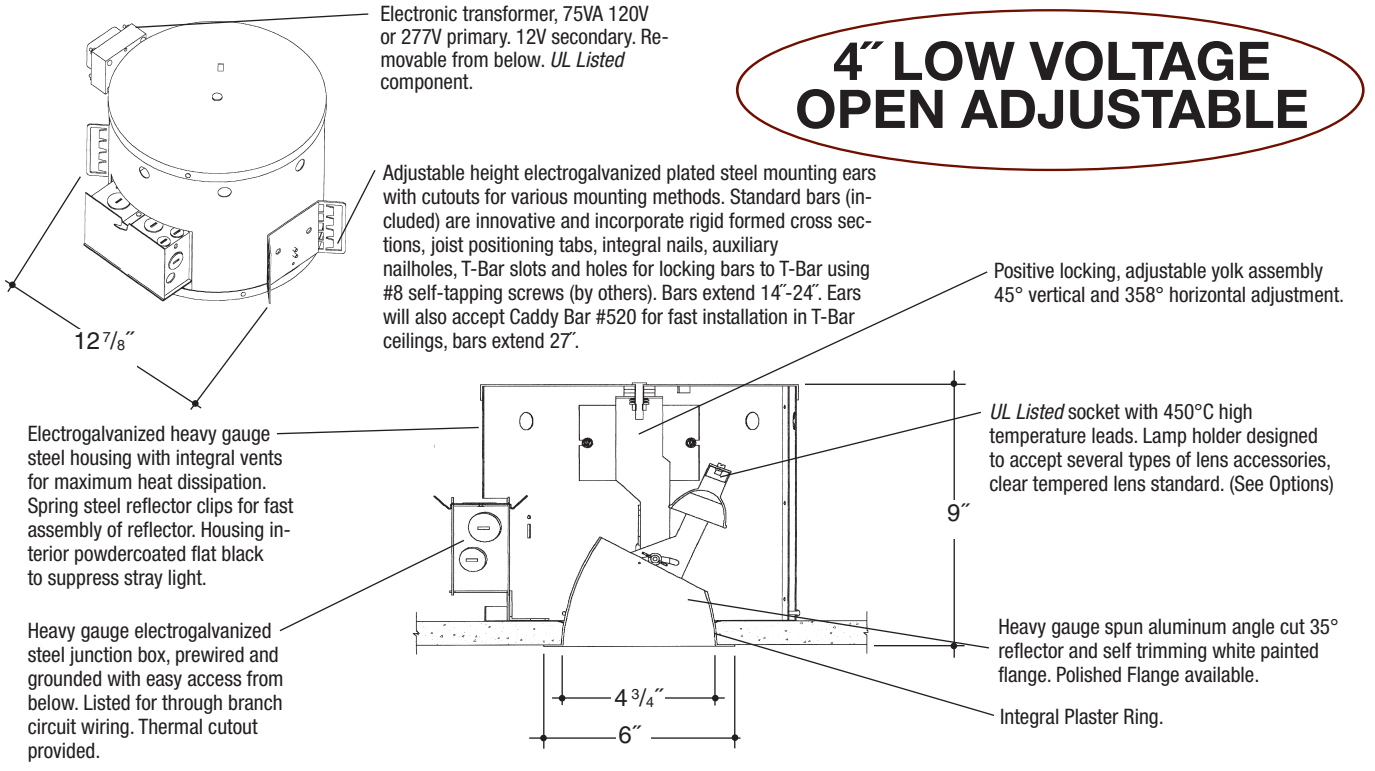

**4" LOW VOLTAGE OPEN ADJUSTABLE**

## Rough in Kit – 4" Low Voltage Adjustable (75W MR16; 50W MR16)

Catalog number **A4LV-ADJ**

<b>A4LV-ADJ</b>	<b>Wattage</b>	<b>Transformer</b>	<b>Voltage</b>	<b>Transformer</b>	
	75W MAX. MR16 50W MR16	E	1 2	E	Electronic
				1	120 Volts
				2	277 Volts

## Finishing Kit – 4" Low Voltage 35° Angle Cut "Alzak" Open Reflector

Catalog Number **4300**


<b>4300</b>	<b>Finish</b>	<b>Option</b>	<b>Lamp Lens Options</b>	<b>Finish (Factory Standard)</b>	
	SCL SGO WHT	PF GSK	14 LS	<b>SCL</b>	Specular Clear "Alzak" with White Flange
				<b>SGO</b>	Specular Gold "Alzak" with White Flange
				<b>WHT</b>	White Reflector with White Flange
				<b>Options ▲</b>	
				<b>PF</b>	High Polished Flange
				<b>GSK</b>	Neoprene Foam Single Gasketing
				<b>Lamp Lens Options</b>	
				<b>14</b>	Prismatic Glass Lens
				<b>LS</b>	Linear Spread Lens

### Features

Manufactured and Listed to UL 1598, ETL and CSA standards.  
Suitable for Damp Locations  
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.  
Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.



76 Community Avenue Plainfield, CT 06374  
voice (860)564.4512 fax (860)564.4854  
www.vantageitg.com

04/10

Luminaires