


Architectural Cylinders


Job Name _____

Type _____


**10"x7" H.F.
LENSED BAFFLED**

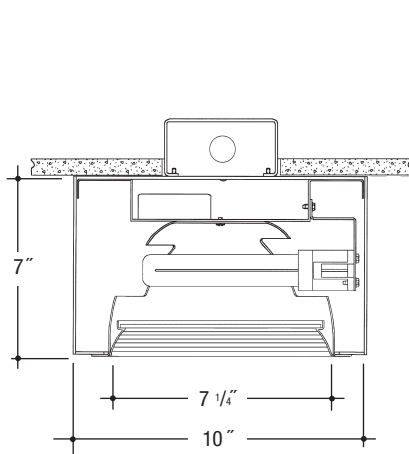

VC107SHF2 – Ceiling Mount

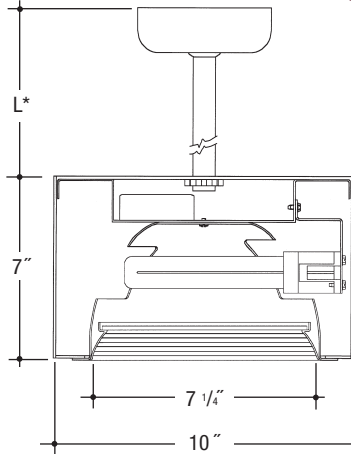

VP107SHF2 – Pendant Mount

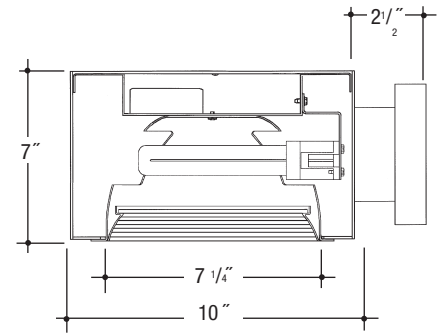

VW107SHF2 – Wall Mount

Cylinder – Horizontal Fluorescent 2-Lamp (Twin, Quad or Triple Tube) Specular Clear "Alzak" Reflector Lensed Baffled

Catalog Number

| | Wattage | Ballast | Voltage | Finish | Splay | Lens | Options |
|------------------|-----------------|---------|---------|--------|--------|------|---------|
| VC107SHF2 | | | | | | | |
| VP107SHF2 | 42W MAX. PLT••• | E | 1 | WHT | SCL/BL | 11 | REM |
| VW107SHF2 | 32W PLT••• | DA | 2 | BLK | SCL/WH | 14 | |
| | 26W DTT, PLT••• | | 3 | BZ | | 16 | |
| | 18W DTT, PLT••• | | 4 | CS | | | |
| | 13W TT, DTT | | | | | | |

••• 1-Lamp – only for Triple Tube

1-Lamp – Replace VC107SHF2 with VC107SHF1

Electronic Multi-Tap Ballast 120 Thru 277V Factory Standard

Specifications

Housing – .064" thick spun aluminum cylinder. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS).

Socket – Thermo-plastic and positive locking. *UL Listed.*

Ballast – Electronic ballast, Class P, 50/60 HZ-120/277, Programmed Start, thermally protected, 98% Power Factor, 1.00 Ballast Factor, <10% THD, Class A sound rated.

Minimum starting temperature -18°C/0°F.

UL Listed component.

Reflector – Heavy gauge hand spun aluminum shallow reflector with a specular clear "Alzak" finish and baffled splay/lens holder. (Factory Standard) Flange painted to match cylinder color.

Pendant – Pendant mount accepts slope ceilings with a 45° swivel adjustment.

L* – Factory Standard stem length is 12'.

Wall Bracket – Cast Aluminum Construction.

Voltage

| | |
|---|----------|
| 1 | 120 Volt |
| 2 | 277 Volt |
| 3 | 347 Volt |
| 4 | 208 Volt |

Ballast

| | | |
|----|-------------------------------|--------------|
| E | Electronic | (4 Pin Lamp) |
| DA | Advance Mark X Dimming | (4 Pin Lamp) |
| * | 13 Watt Advance Mark VII Only | (4 Pin Lamp) |

Splay/Lens Options ▲

| | |
|--------|-----------------------------|
| 11 | Tempered Clear Lens |
| 14 | Tempered C73 Prismatic Lens |
| 16 | Tempered Fresnel Lens |
| SCL/BL | Black Baffle |
| SCL/WH | White Baffle |

Options ▲

| | |
|-----|--------------------------|
| REM | Remote Emergency Battery |
|-----|--------------------------|

Features

Manufactured and Listed to UL 1598, ETL and CSA standards.

Suitable for Damp Locations

Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

76 Community Avenue Plainfield, CT 06374

voice (860) 564.4512 fax (860) 564.4854

www.vantageitg.com

10/11



VANTAGE