


Architectural Cylinders

Job Name _____

Type _____

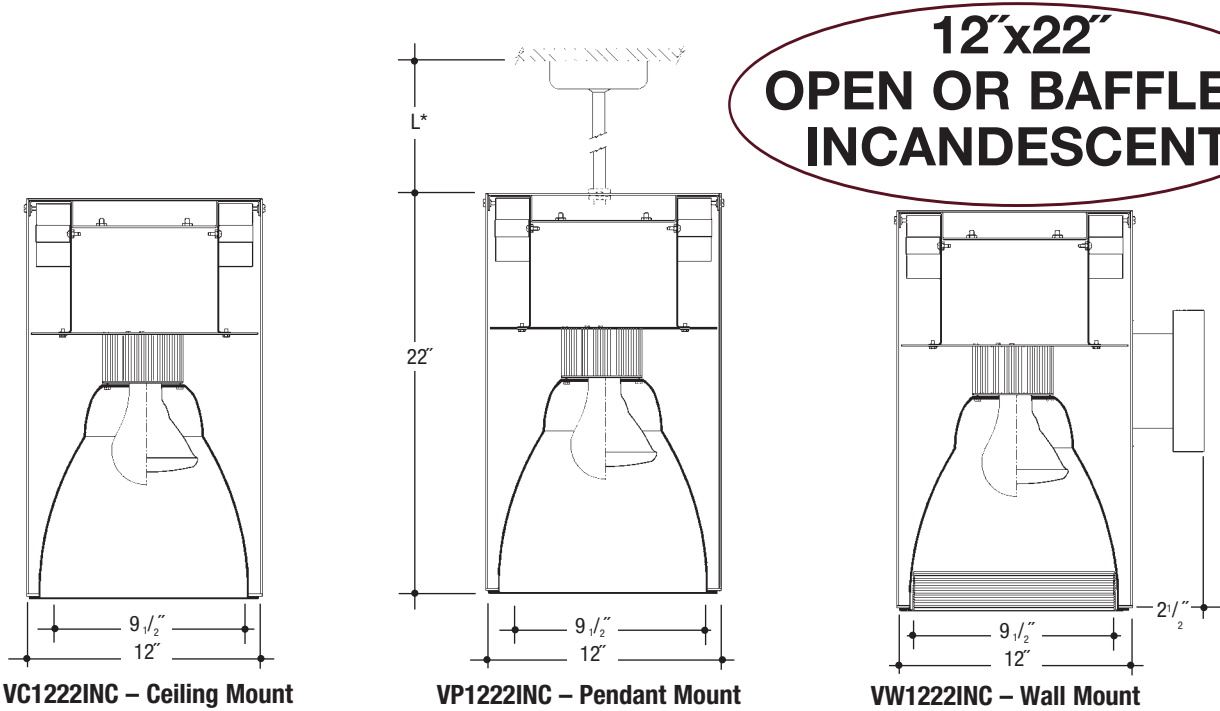

Cylinder – Incandescent (BR40; PS35; PAR38; A23; A21 Lamp) Specular Clear “Alzak” Reflector or Multi-Groove Baffle

Catalog Number

	Wattage	Voltage	Finish	Reflector
VC1222INC				
VP1222INC				
VW1222INC	300W MAX. BR40; PS35 250W PAR38 200W A23 150W A21	1	WHT BLK BZ CS	SCL SGC SCL/BL SCL/WH

Mogul Base – Replace VC1222INC with VC1222INCM

Specifications

Housing – .064” extruded aluminum cylinder. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS).

Socket– Pulse Rated, glazed porcelain, medium or mogul base with nickel plated brass screw shell. *UL Listed.*

Reflector – Heavy gauge hand spun aluminum reflector with a specular “Alzak” finish or multi-groove baffle. Rolled polished flange.

Pendant – Pendant mount accepts slope ceilings with a 45° swivel adjustment.
L* – Factory Standard stem length is 12’.

Wall Bracket – Cast Aluminum Construction.

Voltage

1 120 Volt

Reflector Options ▲

SCL Specular Clear “Alzak” with Polished Flange
SGC Soft Glow Clear “Alzak” with Polished Flange
SCL/BL Specular Clear “Alzak” with Black Baffle and Polished Flange
SCL/WH Specular Clear “Alzak” with White Baffle and Polished Flange

Features

Manufactured and Listed to UL 1598,
ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

76 Community Avenue Plainfield, CT 06374
 voice (860) 564.4512 fax (860) 564.4854
 www.vantageitg.com

07/07



VANTAGE