


Architectural Cylinders

Job Name _____

Type _____

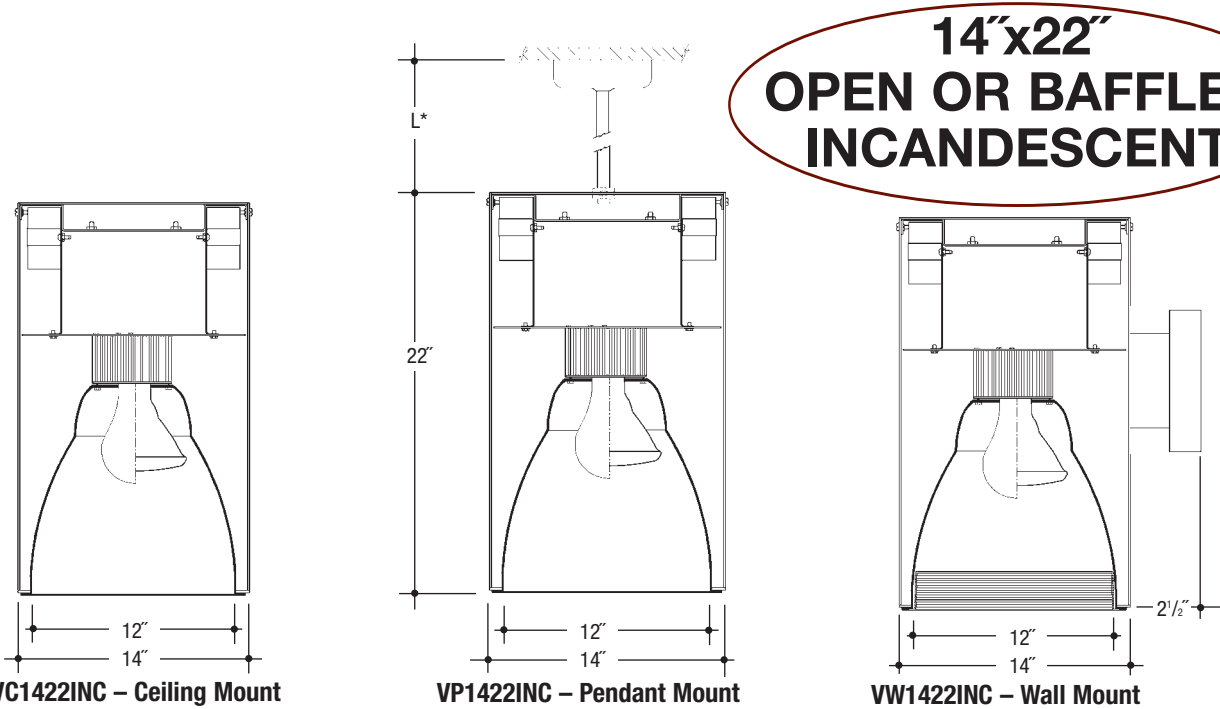

Cylinder – Incandescent (BR40; PS35; PAR38; A23 Lamp) Specular Clear “Alzak” Reflector or Multi-Groove Baffle

Catalog Number

	Wattage	Voltage	Finish	Reflector
VC1422INC				
VP1422INC				
VW1422INC	300W MAX. BR40; PS35 250W PAR38 200W A23	1	WHT BLK BZ CS	SCL SGO SCL/BL SCL/WH

Mogul Base – Replace VC1422INC with VC1422INCM

Specifications

Housing – .064" extruded aluminum cylinder. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS).

Socket– Pulse Rated, glazed porcelain, medium or mogul base with nickel plated brass screw shell. *UL Listed.*

Reflector – Heavy gauge hand spun aluminum reflector with a specular “Alzak” finish or multi-groove baffle. Rolled polished flange.

Pendant – Pendant mount accepts slope ceilings with a 45° swivel adjustment.
L* – Factory Standard stem length is 12'.

Wall Bracket – Cast Aluminum Construction.

Voltage

1 120 Volt

Reflector Options ▲

SCL Specular Clear “Alzak”
SGO Specular Gold “Alzak”
SCL/BL Specular Clear “Alzak” with Black Baffle
SCL/WH Specular Clear “Alzak” with White Baffle

Features


Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374
 voice (860)564.4512 fax (860)564.4854
 www.vantageitg.com

07/07