


Architectural Cylinders

Job Name _____

Type _____

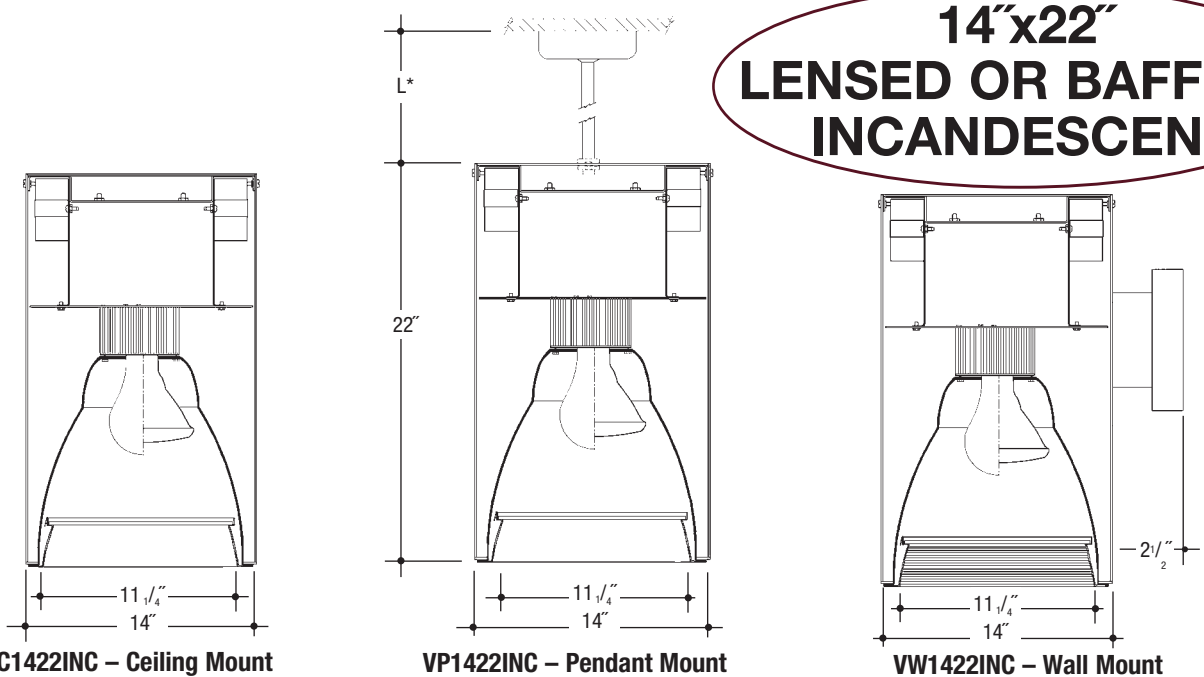

Cylinder – Incandescent (PAR38; A23; A21 Lamp) Specular Clear “Alzak” Reflector Lensed or Baffled Lens
 Catalog Number

	Wattage	Voltage	Finish	Splay	Lens
VC1422NC					
VP1422INC					
VW1422INC	300W MAX. BR40 250W PAR38 200W A23 150W A21	1	WHT BLK BZ CS	SCL SGC SCL/BL SCL/WH	11 14 16

Specifications

Housing – .064” extruded aluminum cylinder. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS).

Socket– Pulse Rated, glazed porcelain, medium or mogul base with nickel plated brass screw shell. *UL Listed.*

Reflector – Heavy gauge hand spun aluminum reflector with a specular clear “Alzak” finish or baffled splay/lens holder. Rolled polished flange (Factory Standard) or flange to match cylinder color.

Pendant – Pendant mount accepts slope ceilings with a 45° swivel adjustment.
 L* – Factory Standard stem length is 12”.

Wall Bracket – Cast Aluminum Construction.

Voltage

1 120 Volt

Splay/Lens Options ▲

- 11 Tempered Clear Lens
- 14 Tempered C73 Prismatic Lens
- 16 Tempered Fresnel Lens
- SCL Specular Clear “Alzak”
- SGC Soft Glow Clear “Alzak”
- SCL/BL Black Baffle
- SCL/WH White Baffle

Features

Manufactured and Listed to UL 1598,
 ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

76 Community Avenue Plainfield, CT 06374
 voice (860) 564.4512 fax (860) 564.4854
 www.vantageitg.com

07/07



VANTAGE