

# Architectural Pendants

Job Name \_\_\_\_\_

Type \_\_\_\_\_

Pendant – P – Stem mount accepts slope ceilings with a 45° swivel adjustment. Factory Standard stem length is 12".


CK – Cord and Canopy Kit. Factory standard cord length is 72".

CCK – Cord and Cable Kit. Factory standard cord length is 72".

CCCK – Coiled Cord and Cable Kit. Factory standard cord length is 72".

Specify all lengths and Color; White (WHT) or Black (BLK).

Incandescent BR40, PAR38, A23, A21, Medium Base.

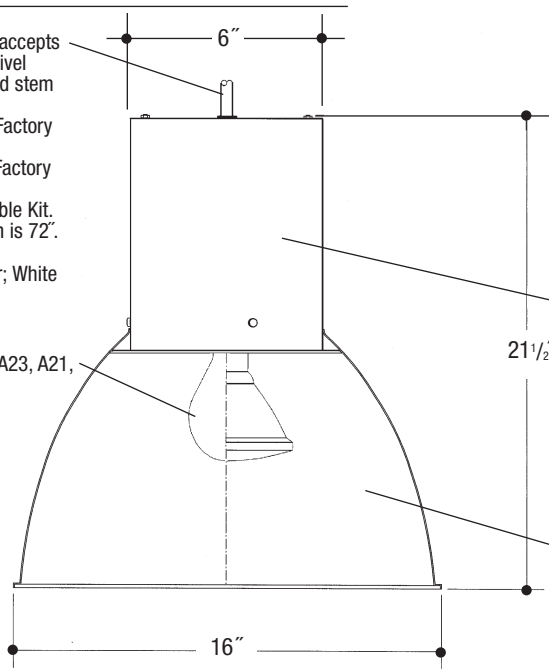

**16"  
INCANDESCENT  
ALUMINUM  
Low Bay**

.064" thick spun aluminum housing vented for proper operating temperature. (CS - Camero Silver color standard)

Heavy gauge, high purity, spun aluminum. Polyester powdercoat finish. (CS - Camero Silver color standard)

## DecoBay – 16" Incandescent Pendant Mounted Spun Aluminum Reflector (300W BR40; 250W PAR38; 200W A23; 150W A21).

Catalog Number **AGVLB16INC**

	Wattage	Voltage	Color	Shade Outer	Shade Inner	Mounting	Options
<b>AGVLB16INC</b>	300W MAX. BR40 250W PAR38 200W A23 150W A21	120	WHT BLK BZ CS CC	CS WHT BLK BZ CC	CS WHT	P-_____ CK-_____ CCK-_____ CCCK-_____	BL DL CL

### Specifications

**Housing** – .064" thick spun aluminum cylinder. Vented for proper ballast operating temperature. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS) (Standard), Custom Color (CC).

**Socket** – UL Listed medium porcelain socket, with nickel plated brass screw shell.

**Lamp** – Incandescent BR40, PAR38, A23, A21, Medium Base. (300W PS35 Mogul Base Consult Factory.)

**Reflector** – Heavy gauge, high purity, spun aluminum. Polyester powdercoat finish.

**Pendant** – P – Stem mount accepts slope ceilings with a 45° swivel adjustment. Factory Standard stem length is 12". CK – Cord and Canopy Kit. Factory standard cord length is 72". CCK – Cord and Cable Kit. Factory standard cord length is 72".

CCCK – Coiled Cord and Cable Kit. Factory standard cord length is 72".

Specify all lengths and Color; White (WHT) or Black (BLK).

### Voltage

1 120 Volt

### Color

WHT White  
BLK Black  
BZ Bronze  
CS Camero Silver (Standard)  
CC Custom Color

### Mounting ▲

P – 3/8" Stem and Swivel Canopy Kit. (Specify stem length-WHT/BLK).  
CK – Cord and Canopy Kit. (Specify cord length-WHT/BLK).  
CCK – Cord and Cable Kit. (Specify cord and cable length-WHT/BLK).  
CCCK – Coiled Cord and Cable Kit. (Specify coiled cord and cable length-WHT/BLK).

### Options ▲

BL Flat, Clear Bottom Lens  
DL Drop Prismatic Lens  
CL Conical Lens

Reflexor® by LEXALITE®

### Features


Manufactured and Listed to UL 1598, ETL and CSA standards.  
Suitable for Damp Locations  
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374  
voice (860)564.4512 fax (860)564.4854  
www.vantageitg.com

07/07