

Architectural Pendants


Job Name _____

Type _____

Pendant – P – Stem mount accepts slope ceilings with a 45° swivel adjustment. Factory Standard stem length is 12".
CK – Cord and Canopy Kit. Factory standard cord length is 72".
CCK – Cord and Cable Kit. Factory standard cord length is 72".
CCCK – Coiled Cord and Cable Kit. Factory standard cord length is 72".

Specify all lengths and Color; White (WHT) or Black (BLK).

Incandescent BR40, PAR38, A23, A21, Medium Base.

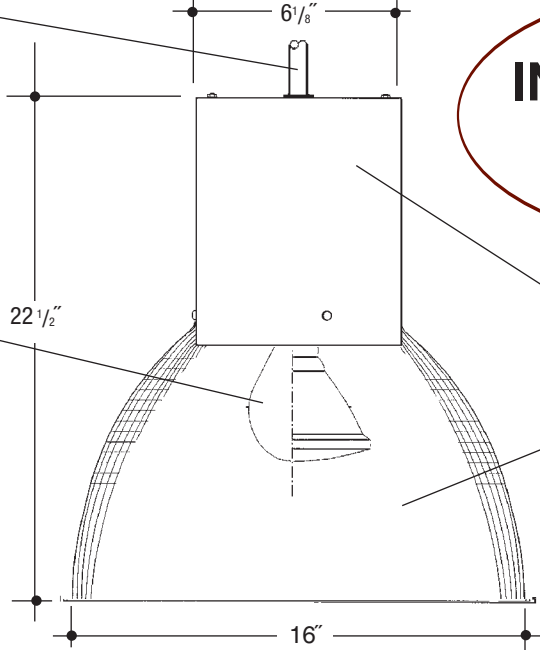

16" INCANDESCENT PRISMATIC Low Bay

.064" thick spun aluminum housing. Vented for proper operating temperature. (CS - Camero Silver color standard)

Prismatic refractor provides excellent efficiency, upright component gives the illuminated space lower contrast and better uniformity.

DecoBay – 16" Incandescent Pendant Mounted Clear Prismatic Refractor (300W BR40; 250W PAR38; 200W A23; 150W A21).

Catalog Number **PGVLB16INC**

	Wattage	Voltage	Color	Mounting	Options
PGVLB16INC	300W MAX. BR40 250W A38 200W A23 150W A21	120	WHT BLK BZ CS CC	P-_____-_____ CK-_____-_____ CCK-_____-_____ CCCK-_____-_____	BL DL CL

Specifications

Housing – Extruded aluminum 'Finned', vented for proper ballast operating temperature. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS) (Standard), Custom Color (CC).

Socket – UL Listed medium porcelain socket, with nickel plated brass screw shell.

Lamp – Incandescent BR40, PAR38, A23, A21, Medium Base. (300W PS35 Mogul Base Consult Factory.)

Refractor – Prismatic refractor provides excellent efficiency, upright component gives the illuminated space lower contrast and better uniformity.

Pendant – P – Stem mount accepts slope ceilings with a 45° swivel adjustment. Factory Standard stem length is 12". **CK** – Cord and Canopy Kit. Factory standard cord length is 72". **CCK** – Cord and Cable Kit. Factory standard cord length is 72".

CCCK – Coiled Cord and Cable Kit. Factory standard cord length is 72".

Specify all lengths and Color; White (WHT) or Black (BLK).

Voltage

1 120 Volt

Color

WHT White
 BLK Black
 BZ Bronze
 CS Camero Silver (Standard)
 CC Custom Color

Mounting ▲

P – 3/8" Stem and Swivel Canopy Kit. (Specify stem length-WHT/BLK).
 CK – Cord and Canopy Kit. (Specify cord length-WHT/BLK).
 CCK – Cord and Cable Kit. (Specify cord and cable length-WHT/BLK).
 CCCK – Coiled Cord and Cable Kit. (Specify coiled cord and cable length-WHT/BLK).

Options ▲

BL Flat, Clear Bottom Lens
 DL Drop Prismatic Lens
 CL Conical Lens

Reflexor® by LEXALITE®

Features


Manufactured and Listed to UL 1598, ETL and CSA standards.
 Suitable for Damp Locations
 Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374
 voice (860)564.4512 fax (860)564.4854
 www.vantageitg.com

07/07