


Architectural Pendants

Job Name _____

Type _____

**16" LOW BAY
4 LT CFL
ALUMINUM**

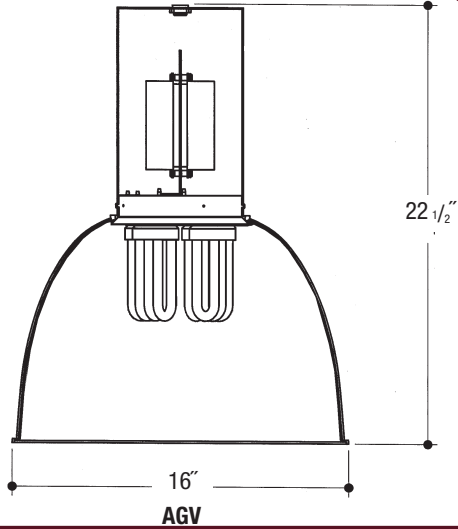

High Bay – 16" Aluminum 4-Lamp (Compact Fluorescent PLH, Triple or Quad Tube)

Catalog Number _____

**AGV16LB
Aluminum**

Lamp Qty. †	Wattage	Switch Leg Qty. ✓	Ballast	Voltage	Finish	Shade Outer	Shade Inner
1	57W* MAX. DT	1	E	1	WHT	CS	CS
2	42W, 32W PLT	1	DA	2	BLK	WHT	WHT
3	26W PLT, DTT	2		3	BZ	BLK	
4	18W PLT, DTT 13W* DTT			4	CS CC	BZ CC	

Options

BL	WG	HCP	REM	SC
CL	HC	P-(XX)	LP	

***57W Available in 2 Lamp MAX Only**
 † Consult Factory for Maximum Lamp/Wattage Combination.
 ✓ Multiple Switch Legs must be Pendant Mounted.

Specifications

Housing – .064" thick spun aluminum cylinder. Vented for proper ballast operating temperature. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS), Custom Color (CC).

Socket – High temperature, Thermo-plastic lamp base rotates and locks into lamp holder. Vibration and earthquake resistant. *UL Listed.*

Ballast – High frequency 50/60Hz electronic ballast. Thermally protected. Min. starting temperature of -18°C/0°F, with a THD of <10%. End of lamp life circuit protection. Power Factor >96%.

Reflector – Heavy gauge, high purity, spun aluminum. Polyester powdercoat finish.

Pendant – Pendant mount accepts slope ceilings with a 45° swivel adjustment. Factory Standard stem length is 12".

Hook, Cord and Plug – Die-Cast aluminum hook, 3-conductor rubber jacketed cable (16/3) and heavy duty Twist-Lock plug with proper NEMA configuration for specified voltage, prewired to ballast. Consult Factory for additional options.

Ballast

E	Electronic
DA	Dimming - Advance Mark X
*	13 Watt Advance Mark VII Only

Voltage

1	120 Volt
2	277 Volt
3	347 Volt
4	208 Volt

Options ▲

BL	Flat, Clear Bottom Lens	P-(XX)	Pendant Mount Swivel Canopy (Specify Length)
CL	Conical Lens	REM	Remote Emergency Battery (Pendant Only)
WG	Wire Guard	LP	Lamps
HC	Die-Cast Hook, 16/3 Cord	SC	Safety Cable
HCP	Die-Cast Hook, 16/3 Cord, NEMA Twist Lock Plug		

Reflexor® by LEXALITE®

Features

Manufactured and Listed to UL 1598, ETL and CSA standards.
 Suitable for Damp Locations
 Wet location under covered ceiling



▲ See Options and Accessories page 594 for a list of additional equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

76 Community Avenue Plainfield, CT 06374
 voice (860) 564.4512 fax (860) 564.4854
 www.vantageitg.com

09/11



VANTAGE