

| | |
|-------------|------|
| Catalog # | Type |
| Project | |
| Notes | Date |
| Prepared by | |

8" LED/F-Class GEN V

LED 8" Lensed Downlight, IC Rated, 750-5000 Lumens



Description

8 inch LED recessed, IC rated luminaire with medium beam spread, featuring superior thermal management with low profile projection into the plenum. Light engine features LED module and LED driver with outputs ranging from 750 to 5000 lumens and color temperatures from 2700 to 5000K. A wide selection of driver, reflector finishes and emergency battery back-up options available.

Specifications and Features

Construction

Galvanized steel mounting frame with integral junction box featuring hinged access covers and spring retaining latches; (3) 3/4" knockouts allowing straight conduit runs. Listed for (8) #12 AWG (4 in, 4 out), 90° C conductors and feed through branch wiring. Driver, LED module and optional battery backup accessible from below ceiling. Reflectors are held in place by friction clips, securing reflector flange tightly to finished ceiling.

Vertically adjustable mounting brackets, accessible from below, accept a variety of mounting bars. Provided as standard with rigid formed, galvanized bar hangers which incorporating joist positioning tabs, integral nails, auxiliary nail holes and T-bar slots. Suitable for joist spacing from 12 to 24".

Light Engine

LED module produces up to 107 lumens per watt. Output ranges from 750 to 5000 lumens with (4) standard color temperatures. Color variations are less than 3-step MacAdam ellipses and have greater than 80 CRI at all color temperatures. Rated life in excess of 50,000 hours at 70% of initial lumen output ($L_{70} \geq 50,000$ hours). Standard driver is Advance Xitanium featuring auto reset thermal protection and 0-10V dimming to 1% of light output with flicker free operation.

Optional Triac (phase control) and Lutron Hi-Lume 2 wire dimming driver available.

Optics

LED module features soft white acrylic window, obscuring LED's, preventing pixilation and producing uniform brightness. Reflectors are a one-piece spinning from heavy gauge, high purity aluminum and are self-flanged. Reflectors are available in both Alzak® and painted finishes, producing a uniform distribution, free of streaks, striations or hotspots while also providing superior cutoff and brightness control. Standard distribution is medium with the ability to tailor distribution pattern with BeamShaper™ optical lensing. Other lens options including glass and polycarbonate materials with a variety of optical properties.

Controls

Compatible with a wide range of controls systems depending on driver selected. Standard driver features SensorReady technology for simple 2 wire connection to motion and daylight harvesting sensors. An open source architecture allows for the use of a wide variety of sensors and the ability to control individual or grouped luminaires through wireless communications. Contact factory for option controls and sensors.

Listings

Manufactured and Listed to UL 1598, ETL and CSA standards. IC rated, insulation may be in direct contact with luminaire. Suitable for Damp Locations; Wet location under covered ceiling. All photometric tests performed by an accredited NVLP facility and in accordance to IESNA LM-79-2008 testing procedures. ENERGY STAR® certified product.

Warranty

5-year warranty on LED module, driver, housing and reflectors.

Ordering Information

EXAMPLE: AIC8VEFLEDU-1130K-L8011FR-SGC

| Series/Source | Voltage | Lumens | Kelvin | Reflector | Lens | Finish | Options |
|-------------------------------------|--|---|---|------------------------------|---|-------------------|--|
| AIC8VEFLED 8" round, IC Rated | U ¹ - 120V-277V 1 - 120 Volts 2 - 277 Volts | -07 - 750 -11 - 1100 -15 - 1500 -20 - 2000 -30 - 3000 -40 ² - 4000 -50 ^{2,3} - 5000 | 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K | L801_ Medium Distribution | 1 1P 1FR 1FRP 4 4P 2D 4D 6D 8D | SCL SGC WHT | TDM ⁴ EM17 ⁷ HCR ¹⁰ PF AT |

Reflector Finish Options

SGL - Specular Clear
SGC - Soft Glow Clear
WHT - White Painted

All trims supplied standard with white painted flange.

Lens Options

1 - Clear Glass
1P - Clear Polycarbonate
1FR - Frosted Glass
1FRP - Frosted Polycarbonate
4 - Prismatic Glass
4P - Prismatic Acrylic

Special Optics

2D - Optical Diffuser-20°
4D - Optical Diffuser-40°
6D - Optical Diffuser-60°
8D - Optical Diffuser-80°

Options

TDM⁴ - Triac Dimming Driver.
EM-17⁷ - Emergency battery back-up. Remote test button & indicator Light.
HCR¹⁰ - 90 CRI (minimum)
PF - Polished Flange.
AT - Airtight.

Notes

1 - Must provide voltage when optional drivers are selected.
4 - TDM driver not available above 5000 lumens.
7 - EM17 for use up to 5000 lumens.
10 - HCR not available above 2000 Lumens.



▲ Consultate Page OP-1 for additional housing and trim options.

▲ Consultate Page LED-DD for decorative trim options.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

LED 8" Lensed Downlight, IC Rated, 750-5000 Lumens

Ceiling Cut Out 7.75"

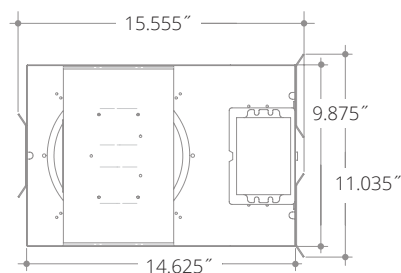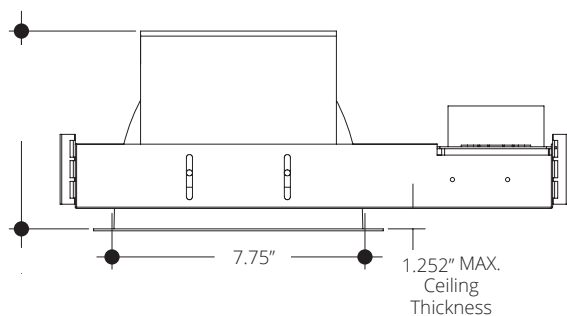

| Lumens | Wattage* |
|--------|----------|
| 750 | 9.4 |
| 1100 | 15.4 |
| 1500 | 21.6 |
| 2000 | 27.2 |
| 3000 | 33.2 |
| 4000 | 45.6 |
| 5000 | 58.5 |

All measured at 3000K
**Actual Wattage/Lumens may vary.*



Photometrics


Test Number
PHM-RPT-180412-01

Model
A8VEFLEDU-5035K-L8011SCL

Lumens
3948.56

Efficiency
66.08

SC
0.9970

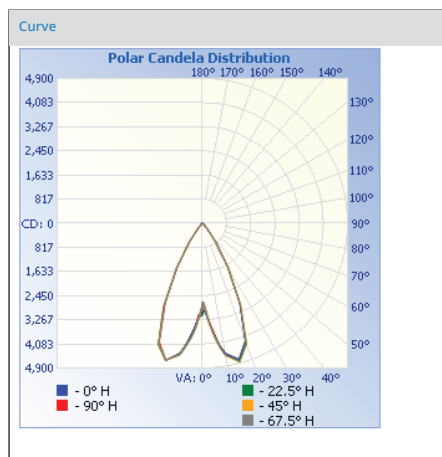

Cone of Light

| | Center Beam fc | Beam Width | |
|------|----------------|------------|-----|
| 1.7 | 1,010 | 1.5 | 1.7 |
| 3.3 | 268 | 3.0 | 3.3 |
| 5.0 | 117 | 4.6 | 4.9 |
| 6.7 | 65.0 | 6.1 | 6.6 |
| 8.3 | 42.4 | 7.6 | 8.2 |
| 10.0 | 29.2 | 9.1 | 9.9 |

| Degrees Vertical | Candela |
|------------------|---------|
| 0.0 | 2919 |
| 1.0 | 2995 |
| 3.0 | 3204 |
| 5.0 | 3597 |
| 7.0 | 3989 |
| 9.0 | 4336 |
| 10.0 | 4474 |
| 15.0 | 4760 |
| 20.0 | 4231 |
| 25.0 | 2978 |
| 30.0 | 1728 |
| 35.0 | 830 |
| 40.0 | 297 |
| 45.0 | 105 |
| 50.0 | 72 |
| 55.0 | 65 |
| 60.0 | 61 |
| 65.0 | 60 |
| 70.0 | 39 |
| 75.0 | 32 |
| 80.0 | 14 |
| 85.0 | 14 |
| 90.0 | 15 |

| Zone | Lumens | % Luminaire |
|--------|---------|-------------|
| 0-30 | 3,028.6 | 76.7 |
| 0-40 | 3,576.8 | 90.6 |
| 0-60 | 3,743.3 | 94.8 |
| 60-90 | 104.6 | 2.6 |
| 70-100 | 66.7 | 1.7 |
| 90-120 | 48.6 | 1.2 |
| 0-90 | 3,847.9 | 97.4 |
| 90-180 | 100.7 | 2.6 |
| 0-180 | 3,948.6 | 100.0 |

VANTAGE LIGHTING F-CLASS GEN V Multipliers

| CRI | MULTIPLIER |
|-----|------------|
| 80 | 1 |
| 90 | 0.81 |

| KELVIN | MULTIPLIER |
|--------|------------|
| 5000K | 1.098 |
| 4000K | 1.035 |
| 3500K | 1 |
| 3000K | 0.975 |
| 2700K | 0.939 |

| FINISH | MULTIPLIER |
|--------|------------|
| SCL | 1 |
| SGC | 0.95 |
| WHT | 0.87 |