





F-CLASS

Commercial

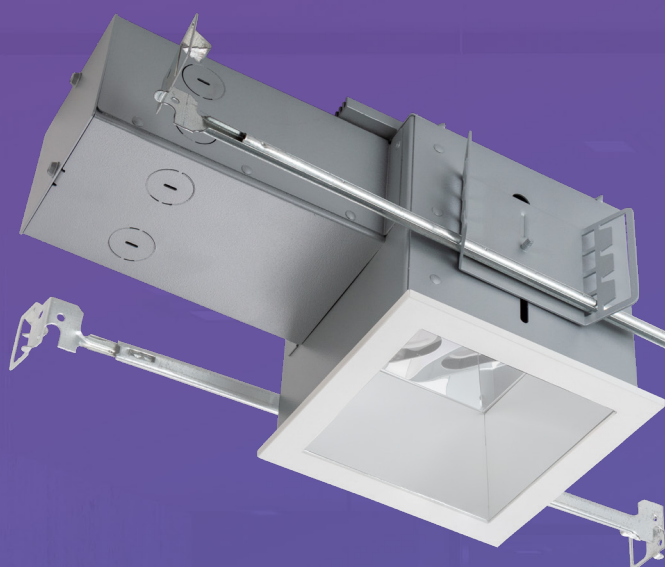

SQUARE
4"X4" & 6"X6"

ROUND
4", 6" & 8"

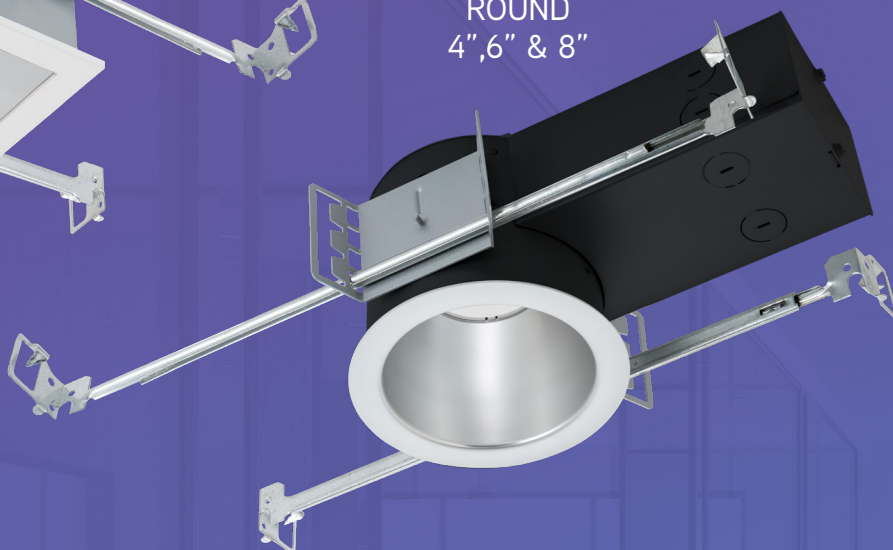

NON-IC
UP TO 5000
LUMENS

IC-RATED
UP TO 2000
LUMENS

Premium Features, Commercial Value


- LUMENS: 750, 1100, 1500, 2000, 3000, 4000 & 5000
- KELVIN: 2700K, 3000K, 3500K, 4000K, & 5000K
- Triac, 0-10V 1% & 0-10V 10% Dimming
- High CRI 90+ Available
- 120V-277V Input Volts
- 50,000 Hour Minimum Lifetime at L70
- Precision Spun Spec-Grade Reflector
- 45° Sharp Cut-Off
- Galvanized US Cold-Rolled Steel Housing
- Retrofit & Remodeler Versions Available
- Cost-Effective Price Point
- 5 Year Warranty on LED Components

F-CLASS

Commercial

OPEN, WALL WASH, ROUND & SQUARE RECESSED LED DOWNLIGHT

Non-IC: 750, 1100, 1500, 2000, 3000, 4000, 5000 Lumens IC-Rated: 1100, 1500, 2000 Lumens

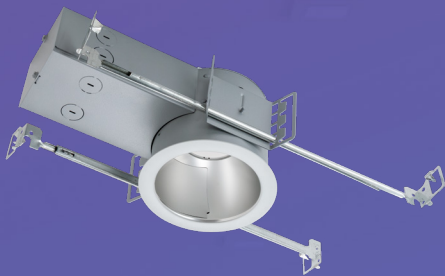


4"

SHOWN AS WALL WASH




6"

SHOWN AS IC-RATED

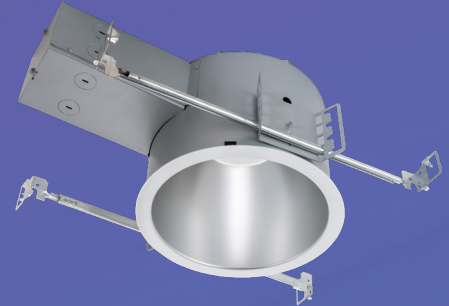

8"

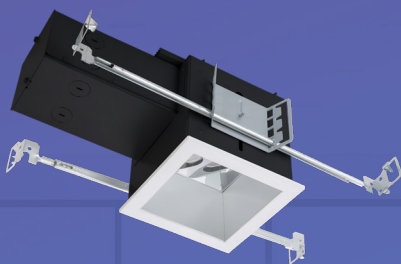

4"x 4"

SHOWN AS IC-RATED



6"x 6"



BAA Compliant
Made in Rhode Island, USA

SPECIFICATIONS

SERIES	LUMENS	KELVIN	REFLECTOR	REFLECTOR FINISH	OPTIONS
4" - V40FCR	07 - 750	27K - 2700K	4" - F4060	SCL - Specular Clear	HCR - High CRI 90+ Min.
4" - V40FCRWW	11 - 1100	30K - 3000K	4" - F4019*	SGC - Soft Glow Clear	REM - Remote Emergency
4" - VIC40FCR*	15 - 1500	35K - 3500K	4" - F4160**	WHT - White Matte	PF - Polished Finish (Flange)
4" - VIC40FCRWW*	20 - 2000	40K - 4000K	6" - F6060		
6" - V60FCR	30 - 3000	50K - 5000K	6" - F6019*		
6" - V60FCRWW	40 - 4000		6" - F6160**		
6" - VIC60FCR*	50 - 5000		8" - F8060		
6" - VIC60FCRWW*			8" - F8160**		
8" - V80FCR			4"x4" - FCSQ44		
8" - V80FCRWW			6"x6" - FCSQ66		
8" - VIC80FCR*					
8" - VIC80FCRWW*					
4"x4" - V440FCSQ					
4"x4" - VIC440FCSQ*					
6"x6" - V660FCSQ					
6"x6" - VIC660FCSQ*					

*IC Rated: 750, 1100, 1500 & 2000 Lumens

DIMMING SOLUTIONS

Triac
0-10V 1%
0-10V 10%

LUMENS WATTAGE

LUMENS	WATTAGE
750	8.8
1100	15.4
1500	20.5
2000	25.3
3000	33.4
4000	58
5000	58.5

*Wattage based on a V40FCR