


Part #	Prepared By
Project	Notes
Type	
Date	

4" Capela® Series

Regressed Lens Round, 700-3000 lumens

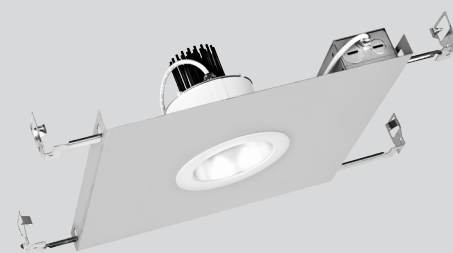

Description

Capela® Series small-aperture architectural shallow downlights provide a modern aesthetic and high-end performance. Regressed Lens Capela® Series downlights have a deeply regressed LED and a frosted polycarbonate lens paired with a precision-spun reflector that provides 15°, 30°, and 45° beam spreads. New Construction, IC-Rated and Remodeler housing options available.

Features & Construction

ELECTRICAL SYSTEM

- Advanced QuickConnect for easy installation
- 700, 3000 lumens
- 2700K - 4000K CCT
- High-performance Dim-to-Warm optional
- Standard 0-10V 1% dimming driver (ZDM)
- 0-10V to 0.1% &, Lutron, & Triac/Forward phase optional
- High flux CoB array
- 80 CRI with 3 SDCM color consistency (+90 CRI optional)
- Minimum 50,000 hour lifetime at L70
- 120V – 277V Universal input standard

OPTICS

- Specular Clear, Soft Glow Clear or White Matte reflector finishes
- Efficient two-stage optical design with frosted polycarbonate regressed lens
- 15°, 30°, and 45° beam spreads

FRAME & MOUNTING

- Self-flanged cold-rolled steel housing
- Polyester powder coat
- Torsion springs for maximum ceiling retention
- Optional IC-rated up to 2000 lumens With IC Box (NCFC)
- Optional new construction frame (NCFAQ)

Listings

- ETL certified to UL 1598 and UL8750 requirements
- Tested according to LM-79 and LM-80 standards
- Suitable for damp locations; Wet location under covered ceiling
- Buy American Act (BAA)

Warranty & Notes

- 5-year limited warranty on LED module and driver
- www.vantageltg.com/product-warranty
- Photometric tests performed by an accredited NVLP facility and in accordance to IESNA LM-79-2008 testing procedures
- Insulation cannot be in contact with non-IC-Rated versions

Performance

OUTPUT

Nominal Lumens	Wattage	All measured at 3500K with a standard medium distribution *Actual Wattage/Lumens may vary.
700	7.56	
1300	12.7	
2000	19.6	
3000	27.4	

EMERGENCY LUMEN OUTPUT

Nominal Lumens	Wattage	All measured at 3500K with a standard medium distribution *Actual Wattage/Lumens may vary.
300	2.5	

DIM-TO-WARM PERFORMANCE

Nominal Lumens	100%				1%			
	Wattage	CCT	CRI	R9	Wattage	CCT	CRI	R9
700	9.7	3100	95	85	2.9	1800	95	85
1300	13.2	3100	95	85	3.3	1800	95	85
2000	20.3	3100	95	85	3.8	1800	95	85

Ordering Information

EXAMPLE: V4CRR-0730K-L4040-SCL-N-WHT-NCFAQ-XDM

Series	Voltage	Lumens	Kelvin	Reflector	Finish	Distribution	Flange Finish	Frame	Options*
V4CRR	U - 120V-277V* 1 - 120 V 3 - 347V**	07 - 700 13 - 1300 20 - 2000 30 - 3000	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K DTW - Dim-to-Warm (3000K-1800K) 2000 Lumen Max	L4040 Regressed Frosted Polycarbonate Lens	SGC Soft Glow Clear SCL Specular Clear WHT White Matte	N - Narrow 15° M - Medium 30° W - Wide 45°	WHT White Matte BLK Black Matte	NCFAQ New Construction Frame NCFC New Construction Frame w/ IC-RATED Box RMDL Remodeler	ZDM (standard) XDM TDM DL-2 DL-3 LDE1 LDES PEQ0 HCR EM

Options in purple qualify for the Velocity Quick Ship Program up to 100 pieces (up to 30 in EM). Refer to Velocity Guide for complete details. NCFAQ only

*Options Notes


ZDM - 0-10V 1% dimming driver (standard)
XDM - 0-10V 0.1% dimming driver
TDM - Triac (Forward-Phase) dimming driver
DL-2 - Lutron 2-Wire Hi-Lume dimming driver
DL-3 - Lutron 3-Wire Hi-Lume dimming driver
LDE1 - Lutron EcoSystem Digital Fade-to-Black 1% dimming driver
LDES - Lutron 5-Series EcoSystem 5% dimming driver
PEQ0 - Lutron EcoSystem Fade-to-Black 0.1% dimming driver
HCR - High CRI, 90+
EM - Remote emergency battery back-up, remote test button & indicator light

4" Capela® Series


Regressed Lens Round, 700-3000 lumens

Dimensional Data


RMDL
(standard)

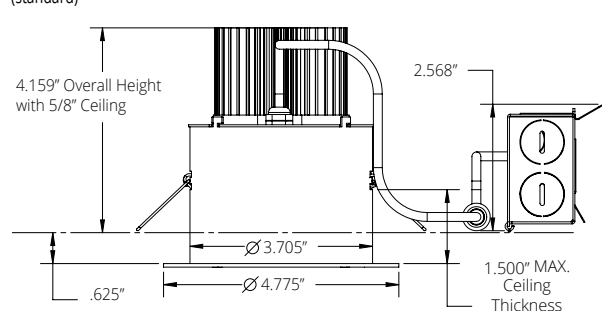


Ceiling Cut Out Ø4.875"

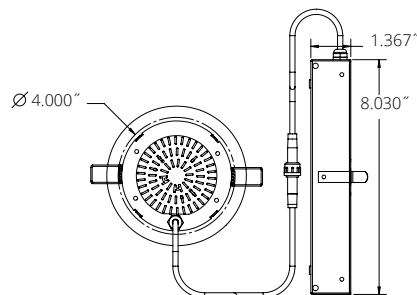


NCFAQ
(new construction frame)

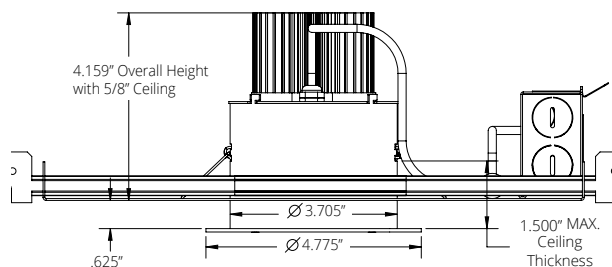

Ceiling Cut Out Ø4.875"




NCFIC
(IC-RATED)

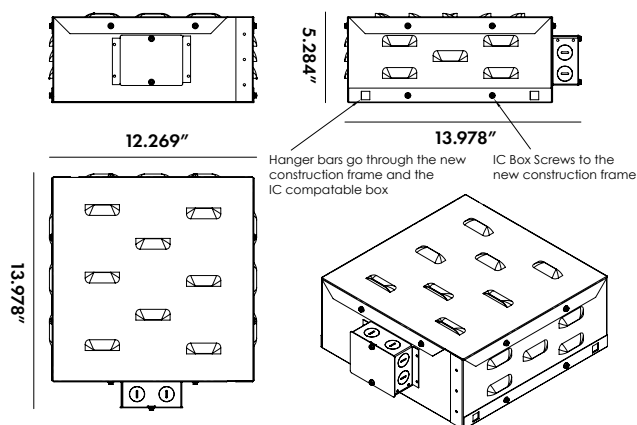

RMDL
(standard)



NCFAQ
(new construction frame)

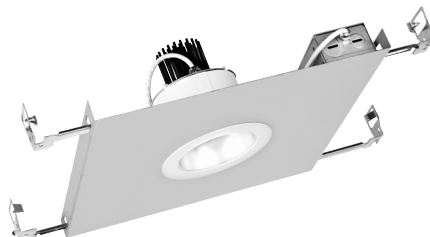

*New construction frame
sold separately

NCFIC
(IC-RATED)



*IC-RATED box
sold separately

4" Capela® Series



Regressed Lens Round, 700-3000 lumens

Capela®
SERIES

Photometry

15° Distribution

Test Number
PHM-RPT-171026-D01
Model
V4CRRU-1335K-N
Lumens
1483.32
Efficacy
108.50914
SC
0.9875

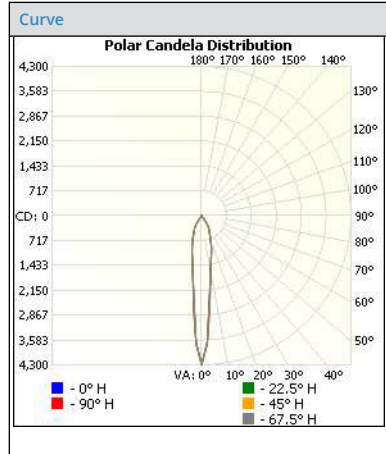

Cone of Light

Center Beam fc	Beam Width
1.7	1600
3.3	425
5.0	185
6.7	103
8.3	67.1
10.0	46.2

Candela Table



Degrees Vertical	Candela
0.0	4624
5.0	4072
10.0	2937
15.0	1923
20.0	1270
25.0	836
30.0	456
35.0	122
40.0	43
45.0	25
50.0	16
55.0	14
60.0	11
65.0	8
70.0	8
75.0	8
80.0	8
85.0	8
90.0	9

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1263.7	85.2
0-40	1375.0	92.7
10-60	1407.4	94.9
60-90	24.6	1.7
0-90	1432.0	96.5
90-180	51.4	0.0
0-180	1483.3	100

30° Distribution

Test Number
PHM-RPT-171026-D08
Model
V4CRRU-2035K-M
Lumens
1944.55
Efficacy
92.42
SC
0.9953

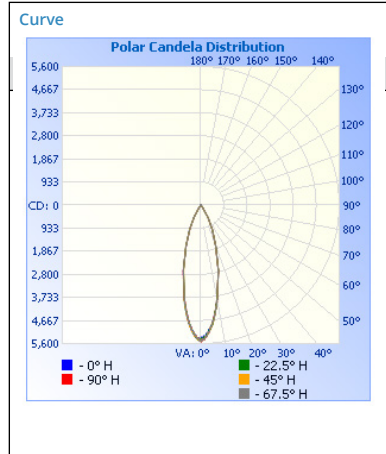

Cone of Light

Center Beam fc	Beam Width
1.7	1876
3.3	498
5.0	217
6.7	121
8.3	78.7
10.0	54.2

Candela Table



Degrees Vertical	Candela
0.0	5422
5.0	4905
10.0	3832
15.0	2733
20.0	1752
25.0	1085
30.0	581
35.0	155
40.0	56
45.0	33
50.0	20
55.0	14
60.0	12
65.0	9
70.0	10
75.0	8
80.0	8
85.0	8
90.0	9

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1680.2	86.4
0-40	1817.7	93.5
10-60	1857.8	95.5
60-90	27.9	1.4
0-90	1885.5	97.0
90-180	58.8	3.0
0-180	1944.6	100.0

45° Distribution

Test Number
103233437CRT-013
Model
V4CRRU-2035K-W
Lumens
1908.5
Efficacy
97.4
SC
0.992

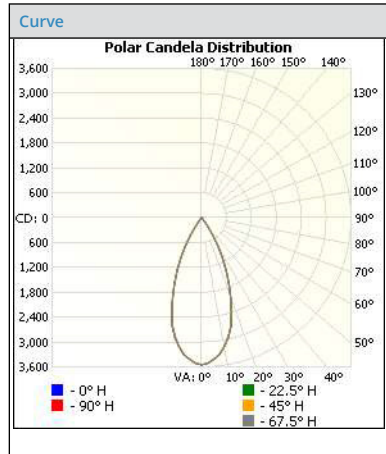

Cone of Light

Center Beam fc	Beam Width
1.7	1227
3.3	326
5.0	142
6.7	79.0
8.3	51.5
10.0	35.5

Candela Table

Degrees Vertical	Candela
0.0	3546
5.0	3417
10.0	3152
15.0	2719
20.0	2046
25.0	1394
30.0	798
35.0	260
40.0	75
45.0	27
50.0	9
55.0	1
60.0	0
65.0	0
70.0	0
75.0	0
80.0	0
85.0	0
90.0	0

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	1682.1	88.1
0-40	1881.8	98.6
10-60	1908.5	100.0
60-90	0.0	0.0
0-90	1908.5	100.0
90-180	0.0	0.0
0-180	1908.5	100.0

CAPELA Lumen Output Multipliers

CRI	MULTIPLIER
80	1
90	0.82

KELVIN	MULTIPLIER
4000K	1.036
3500K	1
3000K	0.974
2700K	0.94

FINISH	MULTIPLIER
SCL	1
SGC	0.95
WHT	0.87

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function. | Capela® is a registered trademark Lexington Lighting Group, LLC dba Vantage Lighting.