


Project Name: \_\_\_\_\_ Type: \_\_\_\_\_

## DIMENSIONS

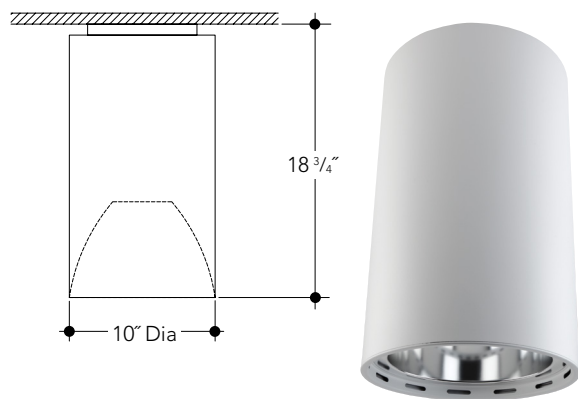

## FEATURES

### Fortimo LED DLM Flex Systems

New Fortimo LED Downlight Module (DLM) Flex systems now provide the latest advances, including high quality LED options to satisfy both functional and performance requirements along with excellent energy efficiency and color consistency. For practical and general lighting applications, the Fortimo LED DLM Flex Module is an excellent solution.

Its direct white mid-power LED technology combines high light quality and energy efficiency levels over 100 lm/W, offering superior price/performance along with low maintenance costs and a long lifetime of 50,000 hours. Three lumen packages are available: 3000, 4000, 5000, 6000 and 7000.

#### Features and Benefits

- High energy efficiency system up to 107 lm/W.
- Wide range of lumen packages from 3000-5000 lm.
- High quality of light with CRI 80 and 3 SDCM color consistency.
- Philips Xitanium driver features internal thermal protection and 0-10V dimming to 1% of lumen output.
- Input volts 120-277V.
- Minimum 50,000 hours of life at L<sub>70</sub> standard.
- Smart systems with Philips Advance Xitanium drivers.
- 5 year warranty on LED module and driver.

#### Cylinder

Housing is .064" thick spun aluminum cylinder. Polyester powdercoat exterior finish with factory standard colors White (WHT), Black (BLK), Bronze (BZ), Silver (CS).

VC Mounting - Ceiling mount over recessed octagonal or 4" square junction box (by others).

VP Mounting - Pendant mount with 3/8" IP x 12" long rigid stem and swivel canopy for mounting on sloped ceilings up to 45°. Custom length stems available.

VW Mounting - Wall mount bracket constructed of cast aluminum and designed for mounting over recessed junction box. (by others).

CCK Cord and Cable Mounting kits available, standard length 72", other lengths available. Provided with 5 conductor cord to support 0-10V dimming.

## CYLINDER STYLES

### OPEN


#### Ceiling Mount

8" Aperture

VC1018PLED Ceiling Mount 10"x18"  
Vertical LED

#### Finish Options

SCL Specular Clear "Alzak"  
SGC Soft Glow Clear  
ECL Etch Clear  
WHT White Reflector




#### Pendant Mount

8" Aperture

VP1018PLED Pendant Mount 10"x18"  
Vertical LED

#### Finish Options

SCL Specular Clear "Alzak"  
SGC Soft Glow Clear  
ECL Etch Clear  
WHT White Reflector




#### Wall Mount

8" Aperture

VW1018PLED Wall Mount 10"x18"  
Vertical LED

#### Finish Options

SCL Specular Clear "Alzak"  
SGC Soft Glow Clear  
ECL Etch Clear  
WHT White Reflector

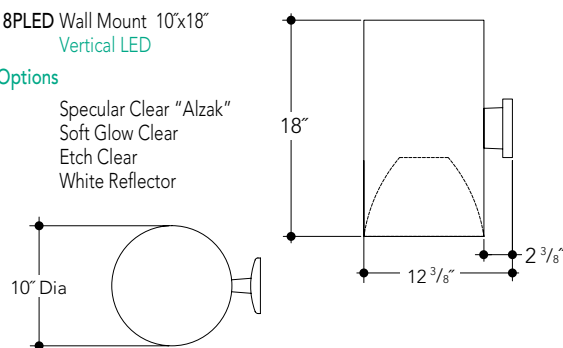

Manufactured and Listed to UL 1598, ETL and CSA standards.  
Interior use only.

## ORDERING INFORMATION

EXAMPLE: VC1018PLED-5040K-WHT-SCL-REM

| Wattage<br>LED  | Mounting | Series   | Lumens     | Kelvin      | Color | Finish | Options   |
|-----------------|----------|----------|------------|-------------|-------|--------|-----------|
| See Chart Below | VC       | 1018PLED | -30 = 3000 | 27K = 2700K | WHT   | SCL    | CCK-(XX") |
|                 | VP       |          | -40 = 4000 | 30K = 3000K | BLK   | SGC    | P-(XX")   |
|                 | VW       |          | -50 = 5000 | 35K = 3500K | BZ    | ECL    | REM       |
|                 |          |          | -60 = 6000 | 40K = 4000K | CC    | WHT    | TDM       |
|                 |          |          | -70 = 7000 |             | CS    |        |           |
|                 |          |          |            |             |       |        |           |

| Lumens  | Wattage* |
|---------|----------|
| 3000-3K | 30.8     |
| 3000-4K | 29.3     |
| 4000-3K | TBD      |
| 4000-4K | TBD      |
| 5000-3K | 52.8     |
| 5000-4K | 50.2     |

\*Actual Wattage/Lumens may vary.

#### Options

CCK-(XX") - Cord and Cable Mounting Kit  
P-(XX") - Additional Stem Length (Specify Length)  
REM - Remote Emergency Battery Backup  
REM not available with the CCK (cord & cable kits)  
TDM - Triac/phase dimming to 20%

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

▲ See Options pages for other options and finishes.