

Part #	Prepared By
Project	Notes
Type	
Date	



# 4"x4" Square, F-Class Commercial IC-RATED Open, LED Downlight, 750-2000 Lumens



## Description

F-Class Commercial downlights are designed to provide premium features at a commercial value. The Open square reflector provides a medium distribution and sharp light cutoff. Standard 0-10V 10% dimming driver; optional drivers available. IC-Rated housing can be in direct contact with insulation.

## Features & Construction

### ELECTRICAL SYSTEM

- 750 - 2000 lumens
- 2700K - 5000K CCT
- 80 CRI with 3 SDCM color consistency (+90 CRI optional)
- Standard 0-10V 10% dimming driver; optional drivers available
- 120 - 277V
- Minimum 50,000 hour lifetime at L70
- -20°C to 30°C Ambient Operating Temperature Range

### OPTICS

- Reflectors available in Alzak® and painted finishes
- Distribution is free of streaks, striations and hotspots
- Medium distribution
- 45° Cutoff

### FRAME & MOUNTING

- Adjustable mounting ears and junction box included
- Mounting ears accept standard hanger bars 14" - 24" (included)
- Knock outs for through wiring
- US cold-rolled steel housing

## Listings

- ETL certified to UL 1598 and UL8750 requirements
- Tested according to LM-79 and LM-80 standards
- Suitable for damp locations; Wet location under covered ceiling
- IC-Rated: insulation can be in direct contact with luminaire
- Buy American Act

## Warranty & Notes

- 5-year limited warranty on LED module and driver
- [www.vantageltg.com/product-warranty](http://www.vantageltg.com/product-warranty)
- Photometric tests performed by an accredited NVLP facility and in accordance to IESNA LM-79-2008 testing procedures

## Lumens

Nominal Lumens	Delivered Lumens	Wattage	Lumens Per Watt
750	654	9.4	69.57
1100	959	15.4	62.27
1500	1308	21.6	60.56
2000	1744	27.2	64.12
All measured at 3500K with a standard medium distribution *Actual Wattage/Lumens may vary.			

## Ordering Information

EXAMPLE: VIC44OFCSQ1-0735K-FCSQ44-SGC-HCR

		-			-		-		
Series	Voltage		Lumens	Kelvin (CCT)	Reflector	Reflector Finish		Options*	
VIC44OFCSQ	<b>U</b> - 120V-277V* *Universal Voltage only available with ZDM-1% Driver.  <b>1</b> - 120V** <b>2</b> - 277V**  **Must specify voltage when standard SDM 10% is selected. TDM (triac) is 120V only.		<b>07</b> - 750 <b>11</b> - 1100 <b>15</b> - 1500 <b>20</b> - 2000	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K <b>50K</b> - 5000K	<b>FCSQ44</b> Medium Beam Open Reflector	<b>SCL</b> Specular Clear <b>SGC</b> Soft Glow Clear <b>WHT</b> White Matte  *All trims supplied standard with white painted flange.		<b>SDM</b> <b>ZDM</b> <b>TDM</b> <b>HCR</b> <b>PF</b> <b>REM</b>	

### \*Options Notes

SDM - 0-10V 10% dimming driver (standard, Must Specify Voltage as 120V or 277V)  
 ZDM - 0-10V 1% dimming driver (Universal Voltage).  
 TDM - Triac (Forward Phase, 120V only) dimming driver.  
 HCR - High CRI, 90+ minimum. Not available in 5000 Kelvin.  
 PF - Polished Flange  
 REM - Emergency battery back-up. Remote test button & indicator light.


# 4"x4" Square, F-Class Commercial IC-RATED

Open, LED Downlight, 750-2000 Lumens

**F-CLASS**  
Commercial



## Dimensional Data

### New Construction

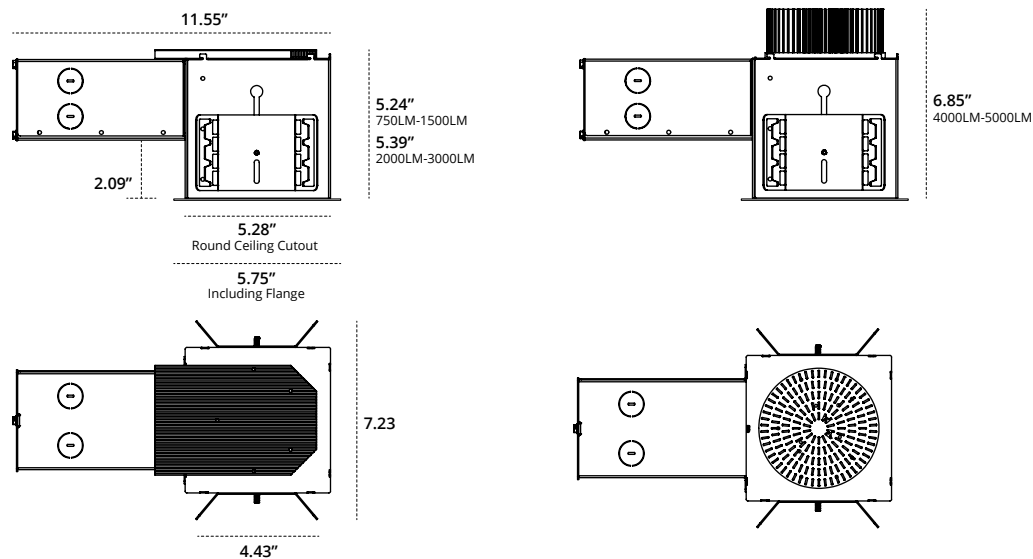

## MEDIUM - MD 2035K

Model  
VIC44OFCRSQ-2035K-  
FCSQ44-SCL  
Lumens  
1744  
Efficacy  
64.12  
SC  
0.984

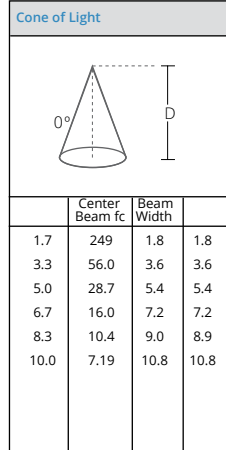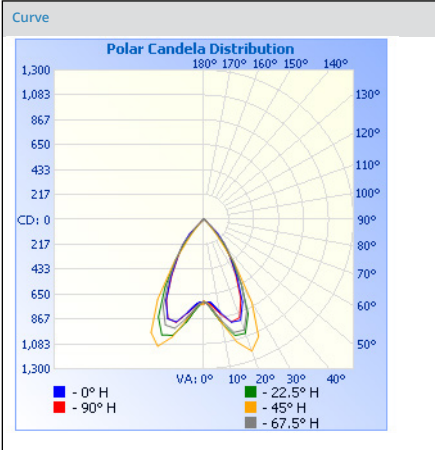

Candela Table	
Degrees Vertical	Candela
0.0	719
1.0	719
3.0	720
5.0	731
7.0	763
9.0	802
10.0	821
15.0	925
20.0	933
25.0	795
30.0	577
35.0	398
40.0	281
45.0	168
50.0	36
55.0	22
60.0	13
65.0	7
70.0	4
75.0	4
80.0	4
85.0	3
90.0	3

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	761.5	64.9
0-40	1031.6	87.9
0-60	1138.1	97
60-90	13.9	1.2
70-100	11.3	1
90-120	9.4	0.8
90-180	21.4	1.8
0-180	1173.4	100

## MULTIPLIER

CRI	Multiplier	Kelvin	Multiplier	Reflector Finish	Multiplier
80	1	2700K	0.939	SCL	1
90	0.81	3000K	0.975	SGC	0.95
		3500K	1	WHT	0.87
		4000K	1.035		
		5000K	1.098		

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.