


Part #	Prepared By
Project	Notes
Type	
Date	

6" Round, vHealth® MRI IC-RATED

Open, LED Wall Wash, MRI, IC-Rated, 750-5000 Lumens

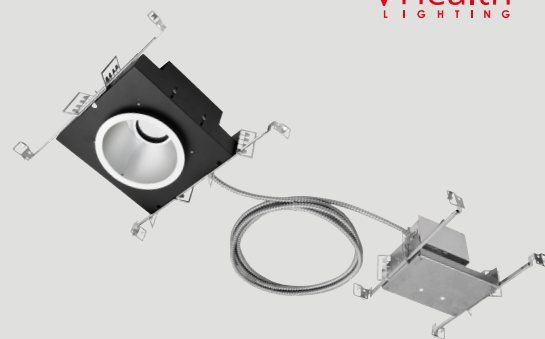

Description

vHealth® MRI luminaires are made with non-ferrous metals to ensure safe and reliable operation in medical imaging suites. Separate light module and fixture housings enable easy installation of the remote power supply. vHealth® MRI lights come standard with antimicrobial trim finishes to help mitigate infection risks throughout medical facilities. Optional EMI Filters available for turnkey solution. The vHealth® MRI Open Wall Wash provides excellent ascent lighting while maintaining sharp cutoff to reduce glare and eye shock potential for patients and technicians. Shallow IC-Rated housings can be in direct contact with insulation.

Warranty & Notes

ELECTRICAL SYSTEM

- 750 - 5000 lumens
- 2700K - 5000K CCT
- 80 CRI with 3 SDCM color consistency (+90 CRI optional)
- Standard 0-10V 1% dimming driver; optional drivers available
- 120 - 277V
- Minimum 50,000 hour lifetime at L70
- -20°C to 30°C Ambient Operating Temperature Range
- Optional 2-Port & 4-Port EMI filters

OPTICS

- Precision spun architectural-grade reflector with integrated 'kicker plate'
- Reflectors available in Alzak® and painted finishes; Antimicrobial standard
- Distribution is free of streaks, striations and hotspots
- Medium distribution
- 45° Cutoff

FRAME & MOUNTING

- Non-Ferrous frame with integrated junction box featuring hinged access covers with spring retaining latches
- Remote mount driver frame with integrated junction box featuring hinged access covers with spring retaining latches
- Vertically adjustable rigid formed mounting brackets that accept a variety of mounting bars with auxillary nail holes and T-bar slots
- T-Bars included, suitable for joist spacing from 12" to 24"
- Supports straight conduit runs - (3) 3/4" knockouts
- Through branch wiring - (8) #12 AWG (4 in, 4 out), 90°C conductors
- Accessibility to all LED components from below ceiling
- Flush to the ceiling reflectors, secured by high quality friction clips

Listings

- ETL certified to UL 1598 and UL8750 requirements
- Tested according to LM-79 and LM-80 standards
- Energy Star® certified versions available (see Vantage Energy Star® guide for details)
- Suitable for damp locations; Wet location under covered ceiling
- IC-Rated: insulation can be in direct contact with luminaire
- Buy American Act

Warranty & Notes

- 5-year limited warranty on LED module and driver, www.vantageltg.com/product-warranty
- Photometric tests performed by an accredited NVLP facility and in accordance to IESNA LM-79-2008 testing procedures

Ordering Information

EXAMPLE: VIC6OVHMRWWU-1130K-MRI6160-SGC-AM-TDM

Series	Voltage	Lumens	Kelvin (CCT)	Reflector	Antimicrobial Finishes	Options**
VIC6OVHMRWW	U - 120V-277V 1 - 120V 2 - 277V *Must provide voltage when optional drivers are selected.	07 - 750 11 - 1100 15 - 1500 20 - 2000 30 - 3000 40 - 4000 50 - 5000	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K 50K - 5000K	MRI6160 Wall Wash Open Reflector	SCL-AM Specular Clear Antimicrobial SGC-AM Soft Glow Clear Antimicrobial WHT-AM White Matte Antimicrobial *All trims supplied standard with white painted flange.	VEMI2 VEMI4 TDM HCR PF EM-17

*Options Notes

VEMI2 - 2-Port EMI Filter
VEMI4 - 4-Port EMI Filter
TDM - Triac (Forward Phase, 120V only) dimming driver
HCR - High CRI, 90+ minimum. Not available in 5000 Kelvin.
PF - Polished Flange
EM-17 - Emergency battery back-up. Remote test button & indicator light. For 750-5000 lumen luminaires.

6" Round, vHealth® MRI IC-RATED

Open, LED Wall Wash, MRI, IC-Rated, 750-5000 Lumens


Dimensional Data

Above Ceiling Height
with 5/8" Ceiling
• 5.51" ≤ 3000L
• 5.71" 4000L & 5000L

Above Ceiling Height
• Max Ceiling Thickness
1.21" - 4.93"
• Min Ceiling Thickness
0.20" - 5.94"

Above Ceiling Height
with 5/8" Ceiling
• 8.15" 6000L & 7000L

Above Ceiling Height
• Max Ceiling Thickness
1.21" - 7.56"
• Min Ceiling Thickness
0.20" - 8.57"

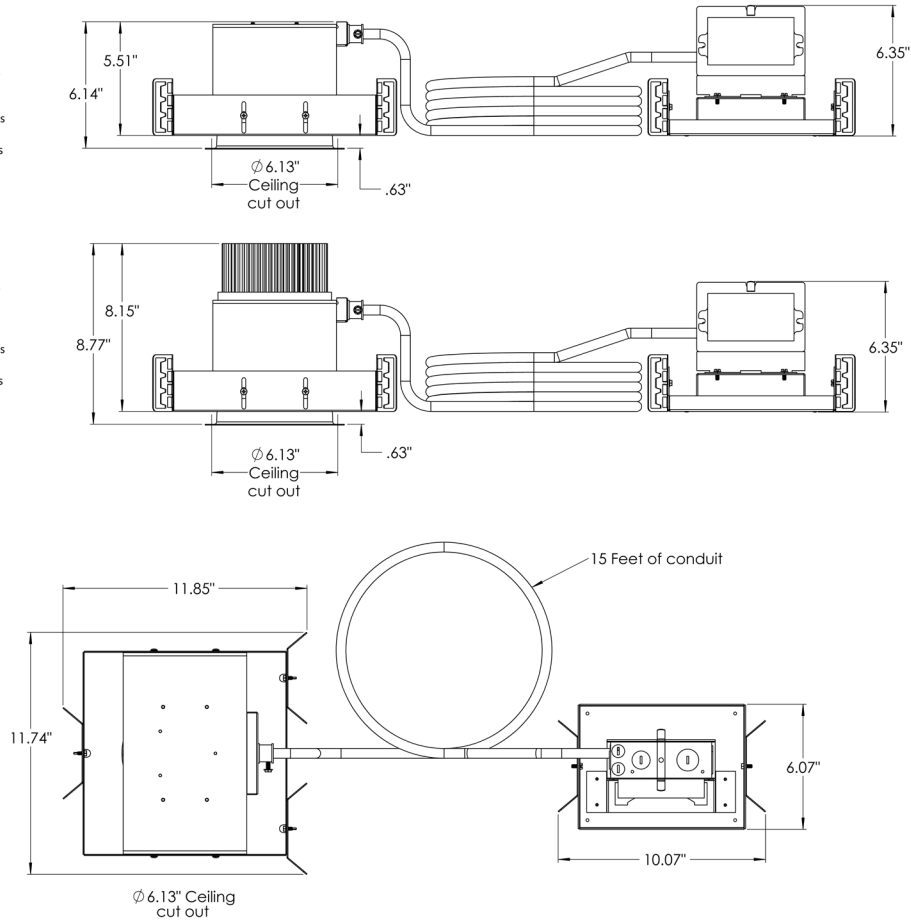

Photometry

Model
VIC6OVHMR1WW-2035K-MR16-160-SCL-AM


Lumens
1,975

Watts
26.07

Efficacy
75.76

SC
0.93

Candela Curve



Cone of Light

Mounting Height AFF	FC at Center on Floor	Beam Diameter
8.0'	38 fc	7.9'
10.0'	24 fc	9.9'
12.0'	17 fc	11.8'
14.0'	12 fc	13.8'
16.0'	10 fc	15.8'
20.0'	6 fc	19.7'
24.0'	4 fc	23.7'
30.0'	3 fc	29.6'

Candela Table

	0.00°
0.00°	2,438
5.00°	2,420
10.00°	2,464
15.00°	2,575
20.00°	2,450
30.00°	720
40.00°	38
50.00°	14
60.00°	9
70.00°	7
80.00°	6
90.00°	5

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0° - 30°	1,705	86%
0° - 40°	1,881	95%
0° - 60°	1,922	97%
60° - 90°	20	1%
0° - 20°	986	50%
20° - 50°	923	47%
50° - 70°	21	1%
70° - 90°	12	1%
0° - 90°	1,941	98%
90° - 180°	34	2%
Total	1,975	100%

Spacing Criterion

Height	Spacing	Light Level*
8 ft	7.4 ft	~ 38 fc
10 ft	9.3 ft	~ 24 fc
12 ft	11.2 ft	~ 17 fc
8 ft	5.6 ft	~ 68 fc
10 ft	7.0 ft	~ 43 fc
12 ft	8.4 ft	~ 30 fc
8 ft	3.7 ft	~ 152 fc
10 ft	4.7 ft	~ 98 fc
12 ft	5.6 ft	~ 68 fc

* approximate direct light level at floor based on spacing criterion overlap

Multiplier

CRI	Multiplier	Kelvin	Multiplier	Reflector Finish	Multiplier
80	1	2700K	0.939	SCL	1
90	0.8	3000K	0.975	SGC	0.95
		3500K	1	WHT	0.87
		4000K	10.35		
		5000K	1.098		

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

vHealth® is a registered trademark of Lexington Lighting Group, LLC dba Vantage Lighting



VEMI2 - 2-Port EMI Filter

VEMI4 - 4-Port EMI Filter

APPLICATIONS

- MRI Rooms

MATERIALS

- Steel Enclosure
- Steel Threaded Pipe
- Easy Connect Terminal Blocks

ELECTRICAL

- Calss II output 100W
- 3A / up to 40VDC



SPECIFICATIONS

- Filter provides >100dB attenuation between 10Khz - 1Ghz on 0-10V dimming circuits
- Operating temperature rating: -10°C to + 60°C


MECHANICAL (DIMENSIONS - INCHES)

PART NUMBER	DESCRIPTION	LENGTH	WIDTH	DEPTH
VEMI2	2-Port EMI Filter	8.70"	3.98"	1.93"
VEMI4	4-Port EMI Filter	8.70"	6.73"	1.93"



VEMI2 - 2-Port EMI Filter

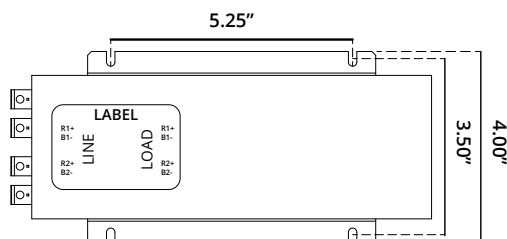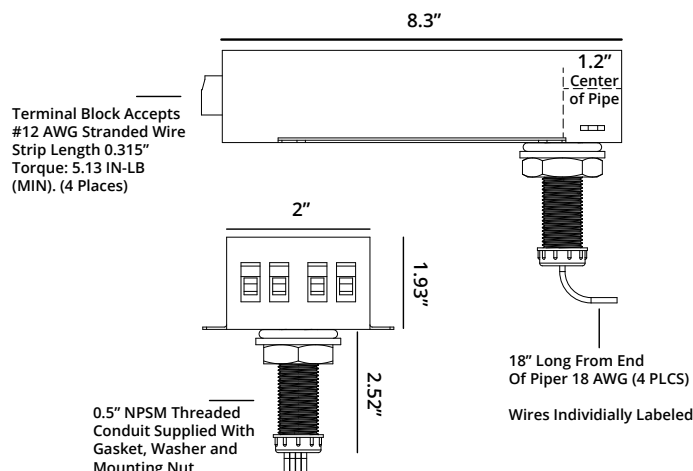

ELECTRICAL SCHEMATIC



VEMI4 - 4-Port EMI Filter

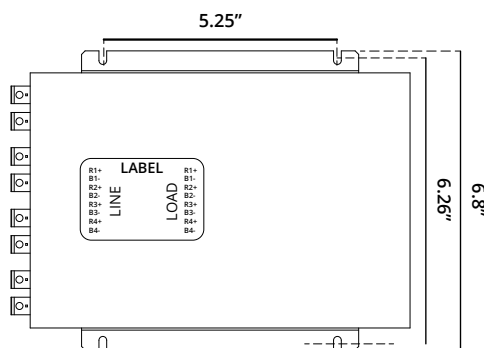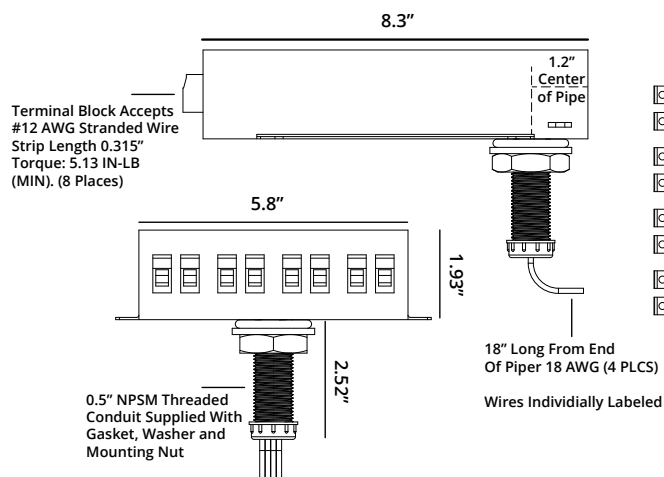

ELECTRICAL SCHEMATIC

