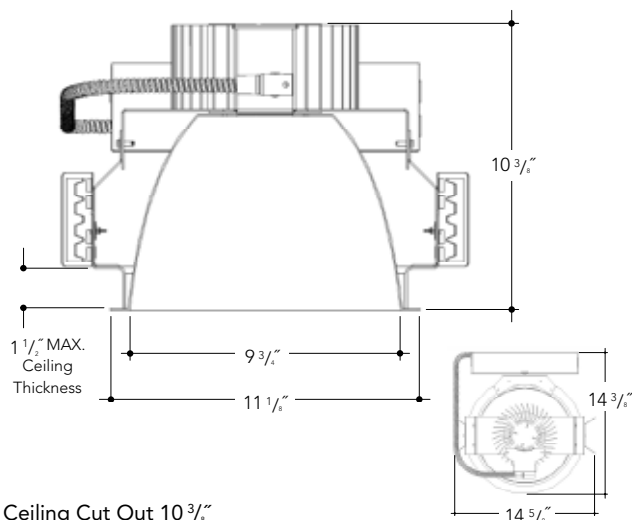


Project Name: _____ Type: _____

DIMENSIONS

Ceiling Cut Out 10 3/8"

FEATURES**Module**

A high output module featuring a wide variety of lumen and color packages. Standard solid state driver, provides stable and efficient performance and a variety of dimming control options.

Benefits

- Highly energy efficient solution: 90-100 lumens per watt.
- Wide range of color temperatures 2700 - 4000K.
- MacAdams color consistency 2-3 steps.
- Module features high quality accurate color production and uniform consistent white light.
- 0-10V Dimming Driver to 10% light output standard. Optional 0-10V Dimming to 1%. Optional DMX Dimming.
- 80 CRI.

Frame

Heavy duty galvanized steel components including frame, adjustable mounting ears and junction box. Fixture is pre-wired and grounded with easy access from below, listed for through branch circuit wiring.


Standard mounting bars (included) incorporate rigid formed cross sections and include joist positioning tabs, integral nails, auxiliary nailholes, T-Bar slots and holes for locking to grid using self-tapping screws (supplied by others). Mounting ears will accept our standard bars (14"-24" ext), optional Caddy #517B (27" ext) and other mounting methods.

Insulation must be kept 3" away from fixture. Listed for damp locations.

REFLECTOR KIT**LENSED - LED - ROUND**

LED 10" Aperture

B101(X) Alzak or Painted Splay
add lens suffix see below



Vantage Lighting offers a variety of high efficiency diffuse optics with a variety of distributions.

Please see optical diffuser option below for lensed fixtures.

All trims supplied standard with white painted flange.



Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations. Wet location under covered ceiling.

ORDERING INFORMATION**EXAMPLE: A10VBLED1-4027K-B1011-SCL-EM**

Wattage LED	Housing	Voltage	Lumens	Kelvin	Reflector	Lens	Finish	Options												
See Chart Below	A10VBLED	1	-40 = 4000	27K = 2700K	B101(X)	1	SCL	AT												
		2	-50 = 5000	30K = 3000K		1P	SGC	DMX												
			-60 = 6000	35K = 3500K		1FR	ECL	EM												
			-80 = 8000	40K = 4000K		4	WHT	HCR												
			-100 = 10000			4P	BLK	PF												
			-120 = 12000			2D		ZDM												
			-150 = 15000			4D														
						6D														
						8D														
<div><div><div>Lumens</div><div>Wattage*</div></div><table><tr><td>4000</td><td>43W</td></tr><tr><td>5000</td><td>58W</td></tr><tr><td>6000</td><td>71W</td></tr><tr><td>8000</td><td>86W</td></tr><tr><td>10000</td><td>106W</td></tr><tr><td>12000</td><td>126W</td></tr><tr><td>15000</td><td>159W</td></tr></table><div>*Actual Wattage/lumens may vary</div></div>		4000	43W	5000	58W	6000	71W	8000	86W	10000	106W	12000	126W	15000	159W	<div>Voltage</div> <div>1 - 120 Volts</div> <div>2 - 277 Volts</div> <div>3 - 347 Volt -</div> <div>Please Consult Factory</div>	<div>Lens</div> <div>1 Clear Glass</div> <div>1P Clear Polycarbonate</div> <div>1FR Frosted</div> <div>4 Prismatic Glass</div> <div>4P Prismatic Acrylic</div>	<div>Special Options</div> <div>2D - Optical Diffuser-20°</div> <div>4D - Optical Diffuser-40°</div> <div>6D - Optical Diffuser-60°</div> <div>8D - Optical Diffuser-80°</div>	<div>Options</div> <div>AT - Airtight</div> <div>DMX - DMX Dimming</div> <div>Driver with RDM</div> <div>*Contact Factory for DMX availability above 1000 lumens.</div>	<div>EM - Emergency Battery</div> <div>HCR - High Color</div> <div>Rendering - 90 CRI Min.</div> <div>PF - Polished Flange</div> <div>ZDM - 0-10V Dimmimg to 1%</div>
4000	43W																			
5000	58W																			
6000	71W																			
8000	86W																			
10000	106W																			
12000	126W																			
15000	159W																			

*Actual Wattage/Lumens may vary.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

▲ See Options pages for other options and finishes.