


Fixture: \_\_\_\_\_ Type: \_\_\_\_\_

## DIMENSIONS

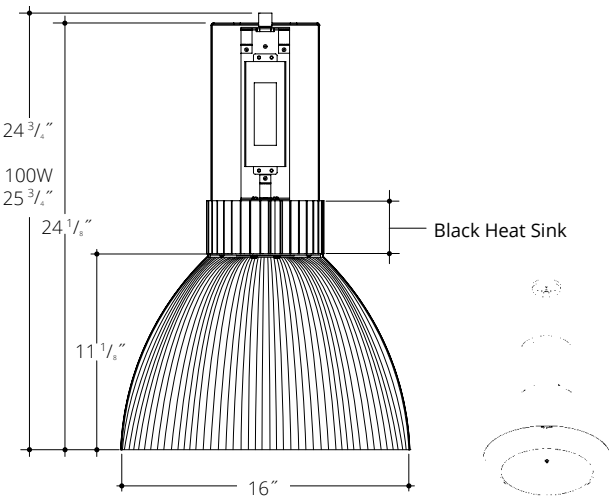

## FEATURES

### High Performance LED Array

A high output module featuring a wide variety of lumen and color packages. Standard solid state driver, provides stable and efficient performance and a variety of dimming control options. Consult factory on dimming.

#### Benefits

- Industry leading lumens per watt (efficacy).
- Wide range of color temperatures 2700 - 4000K.
- MacAdams color consistency 2-3 steps.
- Module features high quality accurate color production and uniform consistent white light.
- 0-10V Dimming Driver to 10% light output standard. Optional 0-10V Dimming to 1%. Optional DMX Dimming.
- 80 CRI standard. High Color rendering option with minimum 90 CRI. Available for most color Temperatures.

**Housing** - .064" thick spun aluminum cylinder. Exterior paint with standard finishes of white, black, bronze, silver or custom color.

**Heatsink** - Black heat sink, factory standard. 4"

**Refractor** - Acrylic prismatic refractor provides excellent efficiency, uplight component gives the illuminated space lower contrast and better uniformity. Polycarbonate refractor provides more rugged performance in an abusive environment. Aluminum heavy gauge, high purity, spun aluminum. Polyester powdercoat finish.


**Pendant** - Factory supplied 3/8" IP x 12" long rigid stem and will accommodate a 45° swivel canopy for a slope ceiling application standard.

## SHADE

### ACRYLIC

LED 16" Aperture


PGVBLED16 Acrylic



### POLYCARBONATE

LED 16" Aperture

LGVLED16 Polycarbonate



### ALUMINUM


LED 16" Aperture

AGVPLED16 Aluminum

#### Outer Shade Color Options

|     |                  |
|-----|------------------|
| WHT | White (Standard) |
| BLK | Black            |
| BZ  | Bronze           |
| CS  | Silver           |
| CC  | Custom Color     |

Interior white standard.



Manufactured and Listed to UL 1598, ETL and CSA standards. Suitable for Damp Locations. Wet location under covered ceiling.

## ORDERING INFORMATION

EXAMPLE: PGVBLED16-6027K-WHT-BL

| Wattage<br>LED  | Housing   | Lumens       | Kelvin      | Housing Color | Outer Shade Color     | Options |
|-----------------|-----------|--------------|-------------|---------------|-----------------------|---------|
| See Chart Below | PGVBLED16 | -50 = 5000   | 27K = 2700K | WHT           | (Aluminum Shade Only) | BL      |
|                 | LGVLED16  | -60 = 6000   | 30K = 3000K | BLK           |                       | CL      |
|                 | AGVPLED16 | -80 = 8000   | 35K = 3500K | BZ            |                       | DMX     |
|                 |           | -100 = 10000 | 40K = 4000K | CS            | WHT                   | HC      |
|                 |           | -120 = 12000 |             | CC            | BLK                   | HCP     |
|                 |           | -150 = 15000 |             |               | BZ                    | HCR     |
|                 |           |              |             |               | CS                    | P-(XX") |
|                 |           |              |             |               | CC                    | SC      |
|                 |           |              |             |               |                       | REM     |
|                 |           |              |             |               |                       | WG      |
|                 |           |              |             |               |                       | ZDM     |

| Lumens | Wattage* |
|--------|----------|
| 5000   | 58W      |
| 6000   | 71W      |
| 8000   | 85W      |
| 10000  | 106W     |
| 12000  | 126W     |
| 15000  | 159W     |

\*Actual Wattage/Lumens may vary.

#### Options

BL - Flat, Clear Bottom Lens  
CL - Conical Lens  
DMX - DMX Dimming Driver with RDM  
HC - Die-Cast Hook, 18/3 Cord

HCP - Die-Cast Hook, 18/5 Cord, NEMA Twist Lock Plug  
HCR - High Color Rendering - 90 CRI Min.  
P-(XX") - Additional Stem Length (Specify Length)

SC - Safety Cable  
REM - Remote Emergency Battery Backup  
WG - Wire Guard  
ZDM - 0-10V Dimming to 1%

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

See Options pages for other options and finishes.