


## DIMENSIONS

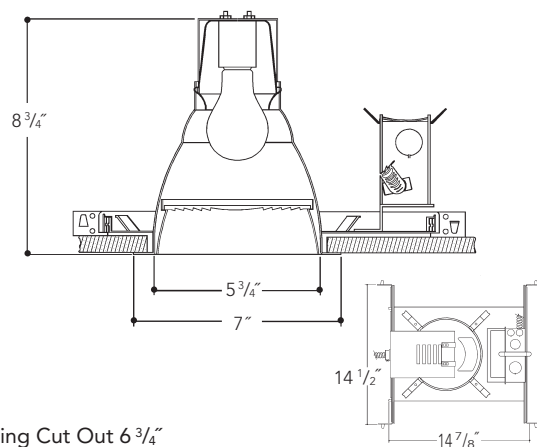

Ceiling Cut Out 6 3/4"

## FEATURES

Electrogalvanized steel frame components with spring steel reflector clips for fast assembly of reflector. Innovative, rigid bar hangers incorporate formed cross sections, joist positioning tabs, integral nails, auxiliary nailholes, T-Bar slots and holes for locking bars to T-Bar using #8 self-tapping screws (supplied by others). Bars extend 14"-24". Frame will also accept Caddy Bar #517B for fast installation in drop-in ceilings, bars extend 27".

Heavy gauge electrogalvanized steel junction box, prewired and grounded with easy access from below. Listed for through branch circuit wiring. Thermal cutout provided.

Aluminum socket cup with spring steel snap-in clips for fast assembly. *UL Listed* medium base porcelain socket, with nickel plated brass screw shell.

Heavy gauge spun aluminum low iridescent reflector with self trimming flanged splay/lens holder and white painted flange. Polished Flange available. Safety chain provided.

## Features



Manufactured and Listed to UL 1598, ETL and CSA standards.  
Suitable for Damp Locations.  
Wet location under covered ceiling.

## ORDERING INFORMATION

EXAMPLE: 6INC-6011-SCL

Lamps and Wattage	Housing	Reflector	Finish	Options
100 A19 (MAX)	6INC 6INC-GU24	6011 6014 6016 6019	SCL SGC ECL WHT	PF TR DGSK 277 SD 347 SD
		Baffled 6021 6024 6026 6029	Baffle BL WH	

## REFLECTOR KIT

## LENSED

- 6011 Tempered Clear  
6014 Tempered Prismatic  
6016 Fresnel  
6019 Drop Opal


Reflector standard Clear "Alzak".  
Other options consult factory.

## Splay/Lens Holder Finish Options

- SCL Specular Clear "Alzak"  
SGC Soft Glow Clear  
ECL Etch Clear  
WHT White

## Options

- PF Polished Flange



## LENSED BAFFLED

- 6021 Tempered Clear  
6024 Tempered Prismatic  
6026 Fresnel  
6029 Drop Opal

Reflector standard Clear "Alzak".  
Other options consult factory.

## Baffled Finish Options

- BL Black Baffle  
WH White Baffle

Polished Flange Not Available

