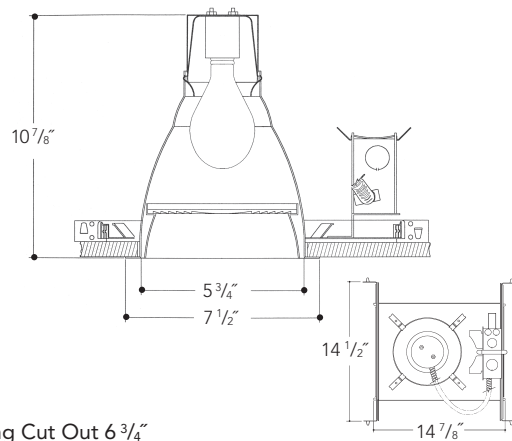


DIMENSIONS

Ceiling Cut Out 6 3/4"

FEATURES

Electrogalvanized steel frame components with spring steel reflector clips for fast assembly of reflector. Innovative, rigid bar hangers incorporate formed cross sections, joist positioning tabs, integral nails, auxiliary nailholes, T-Bar slots and holes for locking bars to T-Bar using #8 self-tapping screws (supplied by others). Bars extend 14"-24". Frame will also accept Caddy Bar #517B for fast installation in drop-in ceilings, bars extend 27".

Heavy gauge electrogalvanized steel junction box, prewired and grounded with easy access from below. Listed for through branch circuit wiring. Thermal cutout provided.

Aluminum socket cup with spring steel snap-in clips for fast assembly. *UL Listed* medium base porcelain socket, with nickel plated brass screw shell.

Heavy gauge spun aluminum low iridescent reflector with self trimming flanged splay/lens holder and white painted flange. Polished Flange available.

Features

Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations.
Wet location under covered ceiling.

ORDERING INFORMATION**REFLECTOR KIT****LENSED**

7011	Tempered Clear
7014	Tempered Prismatic
7016	Fresnel
7019	Drop Opal

Reflector standard Clear "Alzak".
Other options consult factory.


Splay/Lens Holder Finish Options

SCL	Specular Clear "Alzak"
SGC	Soft Glow Clear
ECL	Etch Clear
WHT	White

Options

PF	Polished Flange
----	-----------------

7" Aperture

**LENSED BAFFLED**

7021	Tempered Clear
7024	Tempered Prismatic
7026	Fresnel
7029	Drop Opal


Reflector standard Clear "Alzak".
Other options consult factory.

Baffled Finish Options

BL	Black Baffle
WH	White Baffle

Polished Flange Not Available

7" Aperture


**OPAL DOME SHOWER LIGHT**

7015	Shower Light
------	--------------

Reflector standard Clear "Alzak".
Other options consult factory.

Nonconductive trim for shower application.

7" Aperture



Lamps and Wattage	Housing	Reflector	Finish	Options
100 A19 (MAX)	7INC 7INC-GU24	7011 7014 7016 7019 Baffled 7021 7024 7026 7029 Shower Light 7015	SCL SGC ECL WHT Baffle BL WH	PF TR DGSK 277 SD 347 SD

Options Descriptions

PF - Polished Flange
TR - Tamper Resistant
DGSK - Silicone-Sealed Lens & Gasketing

277V SD - Step Down Transformer
347V SD - Step Down Transformer