



## F•Class Gen V EXPANDED

NOW Available  
Square Apertures, Wall Washers,  
Adjustables, Luna Drop Opal Acrylic,  
Vandal-Resistant Housings &  
Retrofits/Remodelers



750-7000 Lumens  
Next-generation, High-lumen  
4", 6", 8" & 10" Architectural Downlights  
Extreme Shallow and IC Housing Options

Product Shown: AIC4VOFLED


Versatility. Value. Velocity.

# F•Class Gen V

## Versatile Performance.

Vantage Lighting's newly expanded F-Class Gen V architectural series represents a significant leap in performance in recessed lighting. Combining industry-leading 750-7000 lumen output range, precision BeamShaper™ optics, specification-grade reflectors and trims, and smooth dimming down to black, the F-Class Gen V family provides designers state-of-the-art lighting tools, all delivered at an exceptional value.

Broader than ever, the collection now includes square apertures, specification-grade wall washers and adjustables, decorative Luna drop opal acrylic trims, vandal-resistant housings and retrofits/remodelers.

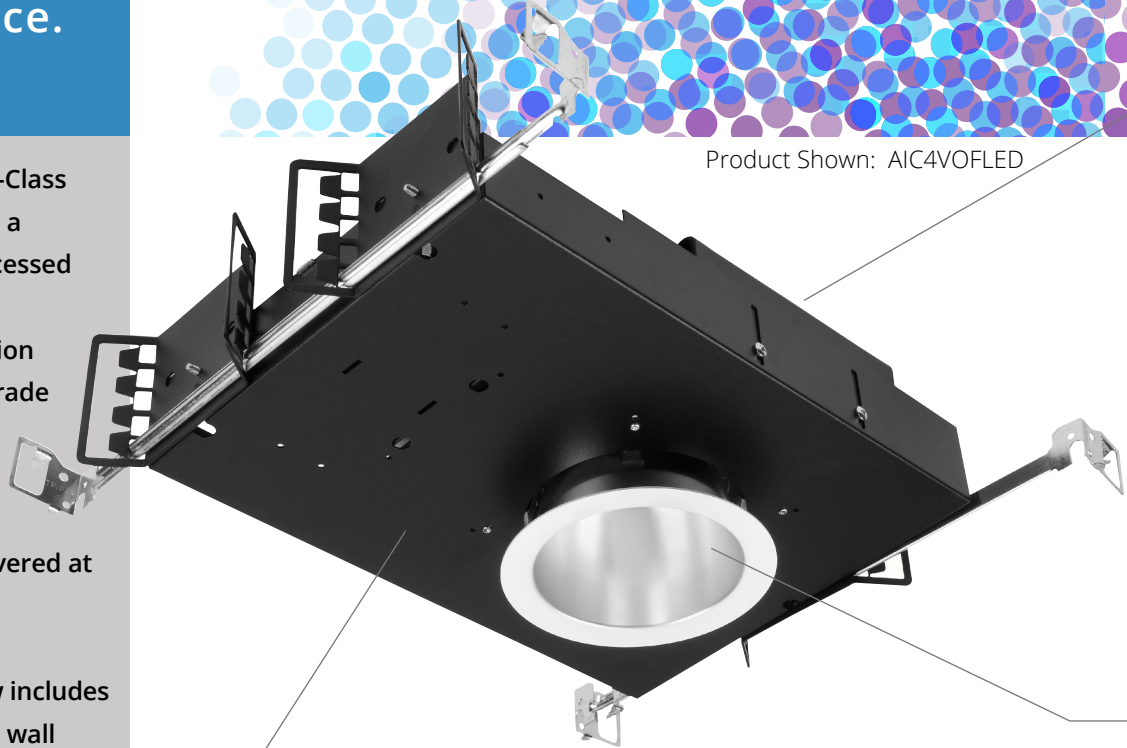


Product Shown: AIC4VOFLED

### Laser-cut, Precision-engineered Frame

For high-quality construction at reduced costs while simultaneously minimizing material wastes and associated environmental impact

## Shallow Dimensions.

Starting at merely 2.7" deep, the F-Class Gen V family offers the shallowest, high-lumen, architectural downlights on the market. Meeting shallow plenum requirements and avoiding mechanical systems above the ceiling plane are now as easy as specifying the F-Class. They are also available in IC-rated configurations up to 5000 lumens.

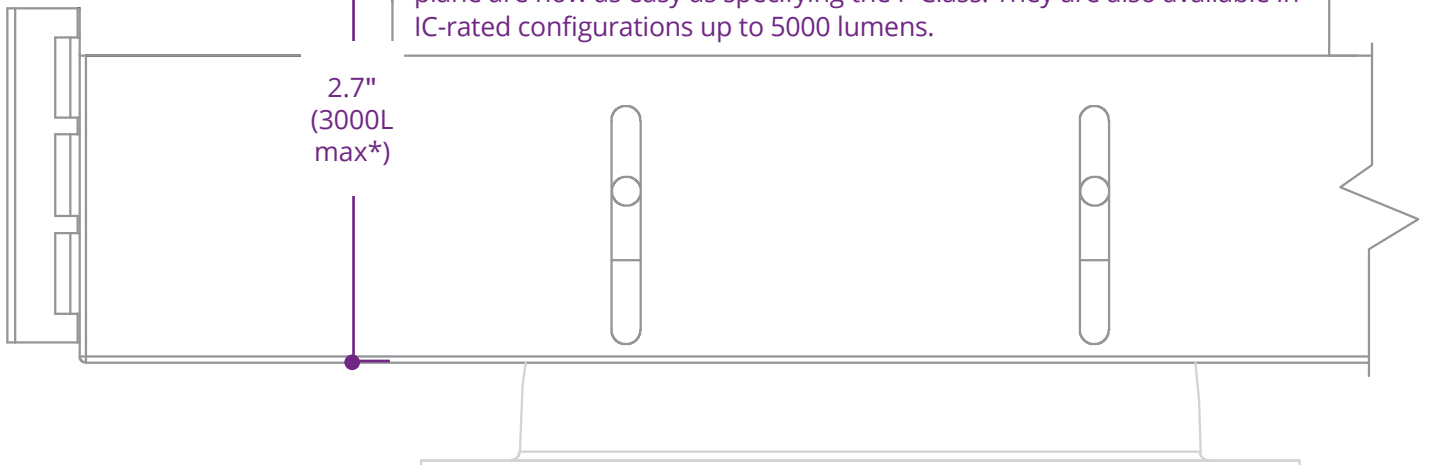

\* Fixture depth = 3" at 4000L and 5000L outputs

## Advanced Aluminum and Graphite Cooling Technology

For superior thermal management and long system rated life of 50,000 hours at 70% of initial lumen output ( $L_{70} \geq 50,000$ )



### 4" Round

**A4VOFLED** Open Downlight  
**A4VEFLED** Lensed Downlight  
**AIC4VOFLED** IC-Rated, Open Downlight  
**AIC4VEFLED** IC-Rated, Lensed Downlight



### 6" Round

**A6VOFLED** Open Downlight  
**A6VEFLED** Lensed Downlight  
**A6VOFLEDES** Open Downlight, Extreme Shallow  
**A6VWOFLED** Wide-Distribution, Open Downlight  
**AIC6VOFLED** IC-Rated, Open Downlight  
**AIC6VEFLED** IC-Rated, Lensed Downlight  
**AIC6VOFLEDES** IC-Rated, Open Downlight, Extreme Shallow



### 8" & 10" Round

**A8VOFLED** 8" Open Downlight  
**A8VEFLED** 8" Lensed Downlight  
**A8VOFLEDES** 8" Open Downlight, Extreme Shallow  
**A8VWOFLED** 8" Wide-Distribution, Open Downlight  
**AIC8VOFLED** 8" IC-Rated, Open Downlight  
**AIC8VEFLED** 8" IC-Rated, Lensed Downlight  
**AIC8VOFLEDES** 8" IC-Rated, Open Downlight, Extreme Shallow  
**A10VOFLEDU** 10" Open Downlight  
**A10VEFLEDU** 10" Lensed Downlight

## High-Flux LED Engine, 750–7000 Lumens

Delivers up to 107 LPW module efficacy and tight color control within 3-step MacAdam Ellipses, ensuring efficient and quality lighting solutions for both standard- and high-ceiling applications

## Proprietary BeamShaper™ Optics

For maximum design flexibility, with 10-80° beam angles available at 10° increments

## Spec-grade Reflector and Trim Finishes

Enable matching ceiling finishes with ease


## Standard High-Performance LED Driver

Provides 0-10V dimming down to 1%, for a reliable, flicker-free lighting control in a wide range of architectural settings



### 6", 8" & 10" Round Retrofit/Remodeler

**A6VOFLEDU (RET or RMD)**  
6" Open Downlight Up to 5000 lumens  
**A8VOFLEDU (RET or RMD)**  
8" Open Downlight Up to 5000 lumens  
**A10VOFLEDU (RET or RMD)**  
10" Open Downlight Up to 5000 lumens

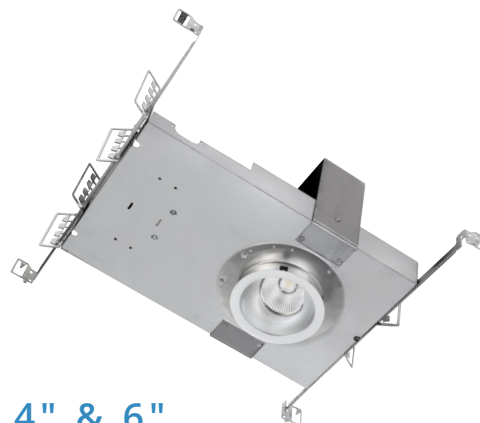

### 4" & 6" Round Adjustable


> Up to 3000 lumens  
> 33° vertical and 360° horizontal adjustability  
> 27° and 40° beam options  
**A4VOFLEDADJ** 4" Open Adjustable  
**A6VOFLEDADJ** 6" Open Adjustable  
**A8VOFLEDADJ** 8" Open Adjustable

All products come with a 5-year warranty.  
Meets 'Buy American' requirements (41 U.S.C. 8301-8305)  
Manufactured and Listed to UL1598, ETL and CSA standards.  
Suitable for Damp Locations. Wet Location under covered ceiling.  
Indoor use only.




# F•Class Gen V

## Expanded Collection

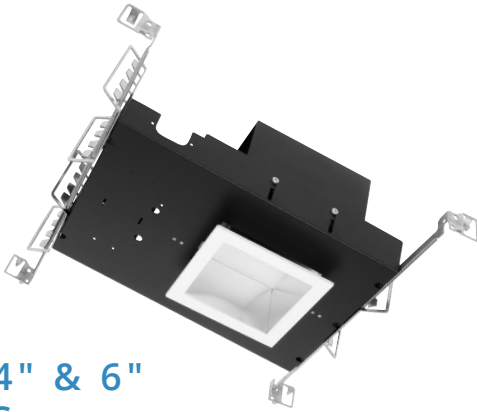


### 4" & 6" Square

**SQ44VEFLED** 4"x4" Enclosed Square  
**SQ44VOFLED** 4"x4" Open Square  
**SQ66VOFLED** 6"x6" Open Square  
**SQ66VEFLED** 6"x6" Enclosed Square  
**SQIC44VEFLED** 4"x4" Enclosed IC-Rated Square  
**SQIC44OFLED** 4"x4" Open IC-Rated Square  
**SQIC66VEFLED** 6"x6" Enclosed IC-Rated Square  
**SQIC66VOFLED** 6"x6" Open Square IC-Rated

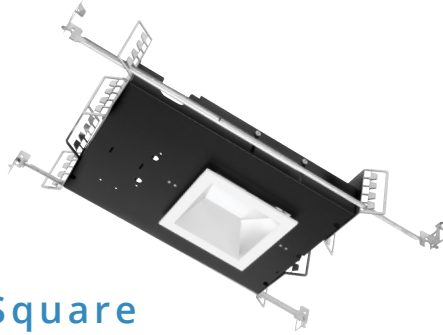


### Square Wall Wash

› Up to 7000 lumens  
**SQ44VEFLEDWW** 4"x4" Enclosed Square Wall Wash  
**SQ66VEFLEDWW** 6"x6" Enclosed Square Wall Wash  
**SQIC44VEFLEDWW** 4"x4" Enclosed Square IC-Rated Wall Wash  
**SQIC66VEFLEDWW** 6"x6" Enclosed Square IC-Rated Wall Wash

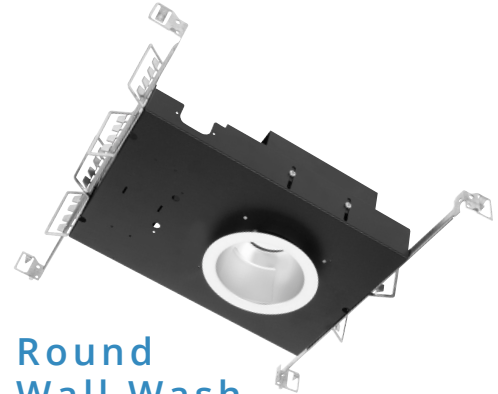


### Round Wall Wash

› Up to 7000 lumens  
**A4VOFLEDWW** 4" Open Wall Wash  
**A6VOFLEDWW** 6" Open Wall Wash  
**A8VOFLEDWW** 8" Open Wall Wash  
**AIC4VOFLEDWW** 4" Open IC-Rated Wall Wash  
**AIC6VOFLEDWW** 6" Open IC-Rated Wall Wash  
**AIC8VOFLEDWW** 8" Open IC-Rated Wall Wash

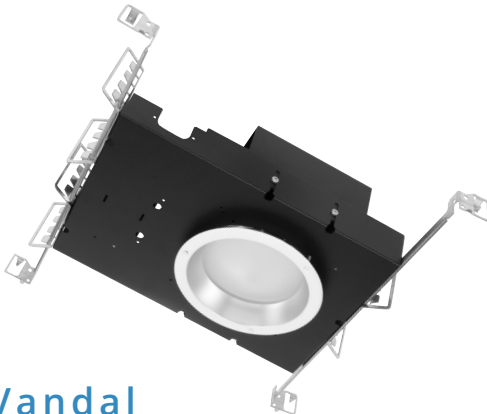

### Vandal Resistant

› Up to 7000 lumens  
**VVR6VEFLED** 6" Enclosed Vandal Resistant  
**VVR8VEFLED** 8" Enclosed Vandal Resistant  
**VVRIC6VEFLED** 6" Enclosed IC-Rated Vandal Resistant  
**VVRIC8VEFLED** 8" Enclosed IC-Rated Vandal Resistant

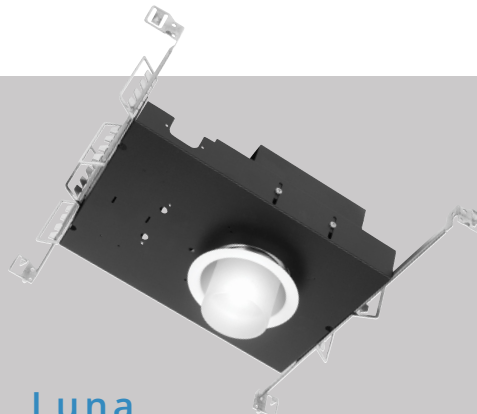


### Luna

› Up to 5000 lumens

#### Round


**VGC4VEFLED** 4" Enclosed Luna  
**VGC6VEFLED** 6" Enclosed Luna  
**VGC8VEFLED** 8" Enclosed Luna  
**VGCIC4VEFLED** 4" Enclosed IC-Rated Luna  
**VGCIC6VEFLED** 6" Enclosed IC-Rated Luna  
**VGCIC8VEFLED** 8" Enclosed IC-Rated Luna

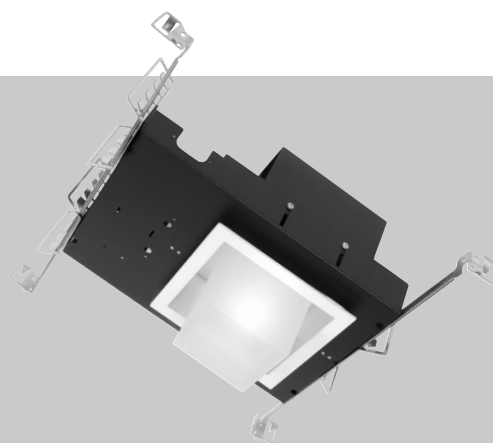

#### Square

**VGCSQ44VEFLED** 4"x4" Enclosed Square Luna  
**VGCSQ66VEFLED** 6"x6" Enclosed Square Luna  
**VGCSQIC44VEFLED** 4"x4" Enclosed Square IC-Rated Luna  
**VGCSQIC66VEFLED** 6"x6" Enclosed Square IC-Rated Luna



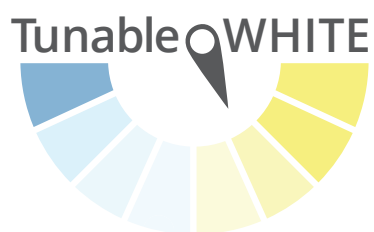

### Tunable White

Vantage Lighting's simple and affordable Tunable White option is designed to bring personalized lighting to the masses by enabling users to: mimic the dynamic qualities of daylight in building interiors to support circadian functions; effortlessly adjust the color temperature between 2700K-5000K for optimal illumination, especially for the ever-changing displays in retail; and tune the lighting to meet a wide range of visual task requirements and individual preferences. The system delivers beautiful, high-quality light at 90 CRI, ensuring true color reproduction. Intelligent dual 0-10V control provides simple, easy-to-install dimming that delivers smooth, flicker-free performance down to black.




### 6", 8" AND 10" ROUND RETROFIT/REMODELER

Upgrade the lighting in existing spaces with Vantage Lighting's complete line of high-performance, round retrofit/remodeler downlights. Offered in outputs up to 5000 lumens, color temperatures from 2700K to 5000K, and dimming options down to dark, this product line is the industry-leading solution for retrofit and remodel applications.









Product Shown: RMD-A6VOFLEDU

**F•Class Gen V**  
Control Options



# F•Class Gen V

## Performance Options

		750	1100	1500	2000	3000	4000	5000	6000	7000
LUMEN OUTPUTS:	IC RATED	●	●	●	●	●	●	●		
	NON-IC	●	●	●	●	●	●	●	●	●
	Extreme Shallow IC RATED^	●	●	●	●	●	●	●		
	Extreme Shallow NON-IC*	●	●	●	●	●	●	●		
CCT:	Tunable White	<div>2700K 3000K 3500K 4000K 5000K</div> <div>2700K - 5000K</div>								
CRI:		80+   90+								
DISTRIBUTIONS:		<div><div><div>10°</div></div><div><div>20°</div></div><div><div>30°</div></div><div><div>40°</div></div></div> <div><div><div>50°</div></div><div><div>60°</div></div><div><div>70°</div></div><div><div>80°</div></div></div> <div>Round Adjustables beam options: 27° or 40°</div>								
DIMMING:		0-10V, 0.1%   0-10V, 1%   DMX   EldoLED Dim to Dark, 0% Lutron Hi-Lume® Fade-to-Black, 1%   Lutron 2-wire   Lutron 3-wire   Triac, 10%								
LENSES:		Prismatic Acrylic		Clear Glass	Prismatic Glass		Clear Polycarbonate		Frosted Polycarbonate	
FINISHES:		Soft Glow Clear		Specular Clear	White Painted					

\* 6" and 8" fixtures only  
<sup>^</sup> 8" fixtures only



181 Narragansett Park Drive  
 East Providence, RI 02916  
 p: (860) 564 4512

[www.vantageltg.com](http://www.vantageltg.com)