

Versatility. Value. Velocity.



LED Cylinders


1", 2", 4", 6", 8", 10" and 12"



Meet the newly expanded Vantage LED Cylinder family.

The best of what's a round.

The new 1", 2", 4" and 6" additions further broaden Vantage Lighting's LED cylinder offerings, expanding the range of lumen levels, apertures, optics and mounting options, all delivered at industry-leading performance at exceptional value.




1" Aperture Downlight Surface, Stem, Cord



Fixture Height: 12"

Rated Lumen Output:




CCT: **2700K 3000K 3500K 4000K**

CRI: 80 and 90 (27K only)


Lens: Frosted Polycarbonate

Distributions:



Dimming Options: 0-10V, Phase


Finishes: White, Black, Silver, Bronze



2" and 4" Aperture Downlight Surface, Stem, Cord, Wall

Fixture Height: 2" = 8"h and 4" = 12"h

Rated Lumen Output:

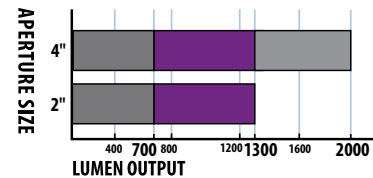


CCT: **2700K 3000K 3500K 4000K**


CRI: 80 and 90

Lens: Frosted Polycarbonate – 2" always lensed; 4" product available as open or lensed

2" Distributions:

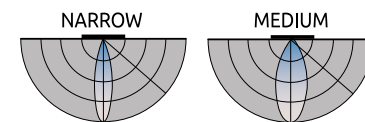

4" Distributions:



Dimming Options: 0-10V, Phase

Finishes: White, Black, Silver, Bronze

All Products: Suitable for Damp Locations 




4" Aperture Uplight/Downlight Wall



Fixture Height: 4" = 12" h

Rated Lumen Output:


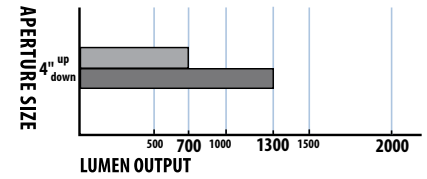


CCT: **2700K 3000K 3500K 4000K**

CRI: 80 and 90

Lens: Polycarbonate lens – uplight always lensed; downlight available as open or lensed

4" Up/Down Distributions:

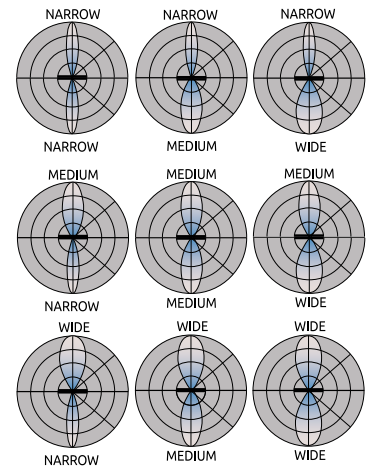


6" and 8" Aperture Downlight Surface, Cord/Cable, Stem, Wall

Fixture Height:

6" = 10" h or 14" h

8" = 14" h

Rated Lumen Output:

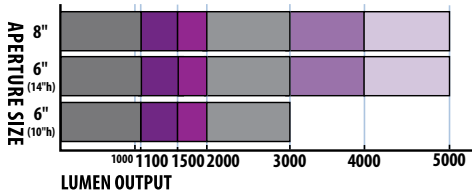


CCT: **2700K 3000K 3500K 4000K**

CRI: 80

6" Lens Options: Clear Glass, Clear Polycarbonate, Frosted, Prismatic Glass, Prismatic Acrylic, and Optical Diffusers in 20°, 40°, 60° and 80°. 6" product available as open or lensed; 8" open only.


6" Distribution:

8" Distribution:



Dimming Option: 0-10V


Finishes: White, Black, Silver, Bronze



10" and 12" Aperture Downlight Surface, Cord/Cable, Stem, Wall

Fixture Height: 10" = 18" h, 12" = 20" h

Rated Lumen Output:

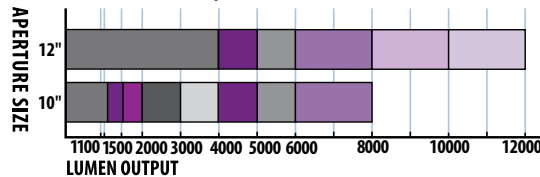


CCT: **2700K 3000K 3500K 4000K**

CRI: 80 and 90

Lens Options: Clear Glass, Clear Polycarbonate, Frosted, Prismatic Glass, Prismatic Acrylic, and Optical Diffusers in 20°, 40°, 60° and 80°. 10" and 12" products available as open or lensed.

10" Distribution:

12" Distributions:



Dimming Options: 0-10V, DMX, Dali

Finishes: White, Black, Silver, Bronze

Dimming Options: 0-10V, Phase
Finishes: White, Black, Silver, Bronze



 6" x 14" open cylinder is part of Vantage Velocity quick-ship program. Available in outputs up to 2000 lumens and in color temperatures of 3000K, 3500K and 4000K. White finish only.

Vantage Lighting is a leading manufacturer of specification-grade downlights and cylinders for commercial and institutional applications. Vantage offers a complete line of energy-efficient new construction, retrofit and remodel luminaires, with a variety of lamp and control options, aperture sizes, styles, mounting types, light distributions, and lumen packages. For over 20 years, specifiers have come to rely on Vantage for our ability to meet project design objectives, budgets, and schedules by consistently developing, manufacturing, and shipping quality lighting products on time.


State-of-the-art **PERFORMANCE** for a tremendous **VALUE**, delivered in **DAYS** — that's **VANTAGE LIGHTING**

RELATED PRODUCTS

Round Downlights, Adjustables and Wall Wash



Square Downlights, Adjustables and Wall Wash

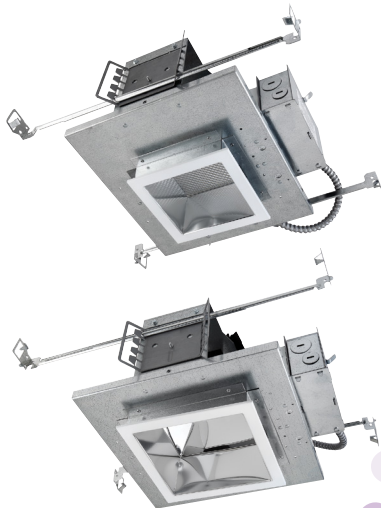

Low Bays



645 Myles Standish Blvd
Taunton, MA 02780
p: (860) 564 4512
f: (508) 822 7046

www.vantageltg.com

