


DIMENSIONS

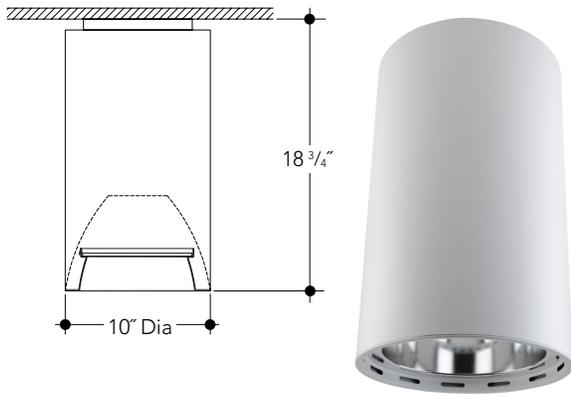

FEATURES

Fortimo LED DLM Flex Systems

New Fortimo LED Downlight Module (DLM) Flex systems now provide the latest advances, including high quality LED options to satisfy both functional and performance requirements along with excellent energy efficiency and color consistency. For practical and general lighting applications, the Fortimo LED DLM Flex Module is an excellent solution.

Its direct white mid-power LED technology combines high light quality and energy efficiency levels over 100 Lm/W, offering superior price/performance along with low maintenance costs and a long lifetime of 50,000 hours. Three lumen packages are available: 3000, 4000, 5000, 6000 and 7000.

Features and Benefits

- High energy efficiency system up to 107 lm/W.
- Wide range of lumen packages from 3000-5000 lm.
- High quality of light with CRI 80 and 3 SDCM color consistency.
- Philips Xitanium driver features internal thermal protection and 0-10V dimming to 1% of lumen output.
- Input volts 120-277V.
- Minimum 50,000 hours of life at L₇₀ standard.
- Smart systems with Philips Advance Xitanium drivers.
- 5 year warranty on LED module and driver.

Cylinder

Housing is .064" thick spun aluminum cylinder. Polyester powdercoat exterior finish with factory standard colors White (WHT), Black (BLK), Bronze (BZ), Silver (CS).

VC Mounting - Ceiling mount over recessed octagonal or 4" square junction box (by others).

VP Mounting - Pendant mount with 3/8" IP x 12" long rigid stem and swivel canopy for mounting on sloped ceilings up to 45°. Custom length stems available.

VW Mounting - Wall mount bracket constructed of cast aluminum and designed for mounting over recessed junction box. (by others).

CCK Cord and Cable Mounting kits available, standard length 72", other lengths available. Provided with 5 conductor cord to support 0-10V dimming.

CYLINDER STYLES


LENSED

Ceiling Mount 8" Aperture

VC1018PLED Ceiling Mount 10"x18" Vertical LED

Finish Options

- SCL Specular Clear "Alzak"
- SGC Soft Glow Clear
- ECL Etch Clear
- WHT White Reflector




Pendant Mount 8" Aperture

VP1018PLED Pendant Mount 10"x18" Vertical LED

Finish Options

- SCL Specular Clear "Alzak"
- SGC Soft Glow Clear
- ECL Etch Clear
- WHT White Reflector




Wall Mount 8" Aperture

VW1018PLED Wall Mount 10"x18" Vertical LED

Finish Options

- SCL Specular Clear "Alzak"
- SGC Soft Glow Clear
- ECL Etch Clear
- WHT White Reflector

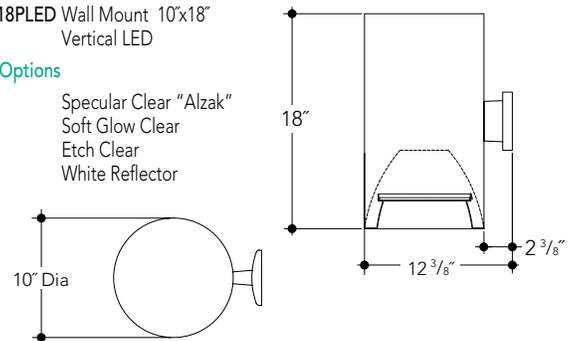

Manufactured and Listed to UL 1598, ETL and CSA standards. Interior use only.

ORDERING INFORMATION

EXAMPLE: VC1018PLED-3030K-1011FR-WHT-SCL-DDM

Wattage LED	Mounting	Series	Lumens	Kelvin	Reflector	Lens	Color	Finish	Options
See Chart	VC	1018PLED	-30 = 3000	27K = 2700K	101(X)	1	WHT	SCL	CCK-(XX")
Below	VP		-40 = 4000	30K = 3000K		1P	BLK	SGC	P-(XX")
			-50 = 5000	35K = 3500K		1FR	BZ	ECL	REM
			-60 = 6000	40K = 4000K		4	CC	WHT	TDM
			-70 = 7000			4P	CS		
						2D			
					4D				
					6D				
					8D				

Lumens	Wattage*
3000-3K	30.8
3000-4K	29.3
4000-3K	TBD
4000-4K	TBD
5000-3K	52.8
5000-4K	50.2

*Actual Wattage/Lumens may vary.

Reflector
101(X) Alzak or Painted Splay

Lens
1 Clear Glass
1P Clear Polycarbonate
1FR Frosted
4 Prismatic Glass
4P Prismatic Acrylic

Special Optics
2D - Optical Diffuser-20°
4D - Optical Diffuser-40°
6D - Optical Diffuser-60°
8D - Optical Diffuser-80°

Options
CCK-(XX") - Cord and Cable Mounting Kit
P-(XX") - Additional Stem Length (Specify Length)
REM - Remote Emergency Battery Backup
REM not available with the CCK (cord & cable kits)
TDM - Triac/phase dimming to 20%

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

▲ See Options pages for other options and finishes.