


# Architectural Grade

Job Name \_\_\_\_\_

Type \_\_\_\_\_

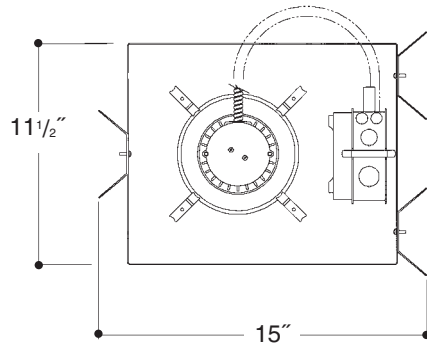


## 6" OPEN WALL WASH HID

Extruded aluminum heat sink socket cup with spring steel snap-in clips for fast assembly. *UL Listed* "open rated" pulse rated, 4KV, medium base porcelain socket, with nickel plated brass screw shell.

Heavy gauge electrogalvanized steel junction box, prewired and grounded with easy access from below. Listed for through branch circuit wiring. Thermal cutout provided.

Adjustable height electrogalvanized plated steel mounting ears with cutouts for various mounting methods. Standard bars (included) are innovative and incorporate rigid formed cross sections, joint positioning tabs, integral nails, auxiliary nailholes, T-Bar slots and holes for locking bars to T-Bar using #8 self-tapping screws (by others). Bars extend 14"-24". Ears will also accept Caddy Bar #520 for fast installation in T-Bar ceilings, bars extend 27".

Heavy gauge spun aluminum reflector with self trimming white painted flange. Aluminum wall washing kicker plate in a bright dip clear finish. Polished Flange available.

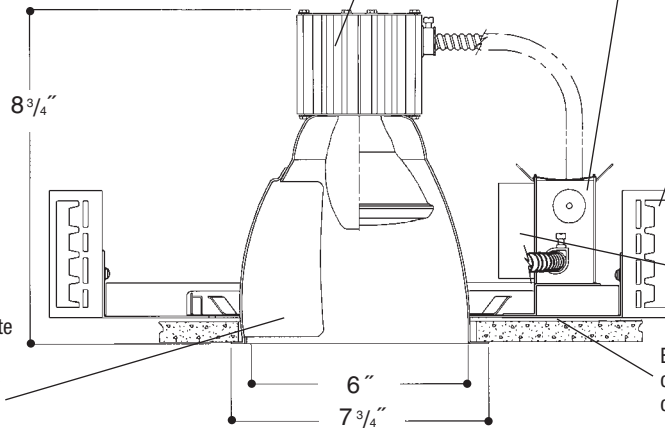

Electronic ballast factory standard. *UL Listed* component.

Electrogalvanized plated steel frame components with spring steel reflector clips for fast assembly of reflector.

### Rough in Kit – 6" HID (ED17 Open Rated\* Lamps). \*Note: 'Open Fixture Rated' lamp must be used.

Catalog Number **A6MHO**

A6MHO	Wattage	Ballast	Voltage	Options
	100W MAX. ED17	H	1	QS
	70W ED17	E	2	QR
	50W ED17		3*	PR
	35W ED17		4	R
				F

Ballast	
H	Encased & Potted "F" Can
E	Electronic
Voltage	
1	120 Volts
2	277 Volts
3*	347 Volts
4	208 Volts
Options	
QS	Quartz Socket
QR	Quartz Restrike
PR	Plaster Ring
R	Remodeler
F	Fused

HPS\* – Replace **A6MHO** with **A6HPSO**

\* – HPS and 347V frame size - 14 1/2" x 17 3/4"

### Finishing Kit – 6" HID Open Reflector Downlight Wall Washer

Catalog Number **6100**

6100	Finish	Options
	SCL	PF
	SGO	DWW
		CWW
		GSK

Finish (Factory Standard)

<b>SCL</b>	Specular Clear "Alzak" with White Flange
<b>SGO</b>	Specular Gold "Alzak" with White Flange

Options

<b>PF</b>	High Polished Flange
<b>DWW</b>	Double Wall Washer
<b>CWW</b>	Corner Wall Washer
<b>GSK</b>	Neoprene Foam Single Gasketing

### Features


Manufactured and Listed to UL 1598, ETL and CSA standards. Suitable for Damp Locations. Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374  
 voice (860)564.4512 fax (860)564.4854  
 www.vantageitg.com

03/10