


Architectural Cylinders

Job Name _____

Type _____

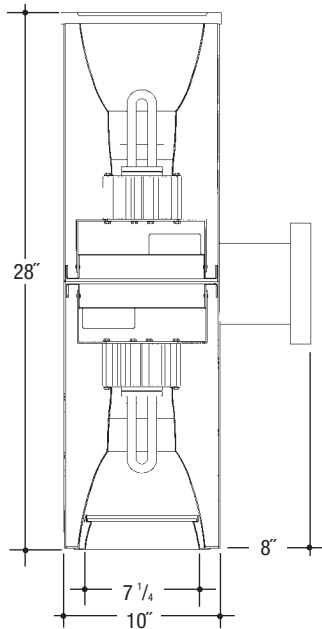

**10"x28" V.F.
LENSED
UP/DOWN**

VW1028VFU1/D1 - Wall Mount

Cylinder – Wall Mount Vertical Fluorescent 1-Lamp Up 1-Lamp Down (Triple or Quad Tube) “Alzak” Reflector Lensed
Catalog Number

VW1028VFU1/D1

Up Wattage	Down Wattage	Ballast	Voltage	Finish	Splay	Lens	Options
42W MAX. PLT	42W MAX. PLT	E	1	BLK	SCL	11	REM
32W PLT	32W PLT	DA	2	WHT	SGO	14	WL
26W DTT, PLT	26W DTT, PLT		3	BZ	WHT	16	
18W DTT, PLT	18W DTT, PLT		4	CS			
13W DTT	13W DTT						

Electronic Multi-Tap Ballast 120 Thru 277V Factory Standard

Specifications

Housing – .064" thick spun aluminum cylinder. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS).

Socket – Thermo-plastic and positive locking. *UL Listed.*

Ballast – Electronic ballasts, Class P, 50/60 HZ-120/277, Programmed Start, thermally protected, 98% Power Factor, 1.00 Ballast Factor, <10% THD, Class A sound rated. Minimum starting temperature -18°C/0°F. *UL Listed* component.

Reflector – Heavy gauge hand spun aluminum reflector with a specular clear “Alzak” finish and white splay/lens holder. (Factory Standard) Clear tempered lens up.

Wall Bracket – Cast Aluminum Construction.

Voltage

1	120 Volt
2	277 Volt
3	347 Volt
4	208 Volt

Ballast

E	Electronic	(4 Pin Lamp)
DA	Advance Mark X Dimming	(4 Pin Lamp)
*	13 Watt Advance Mark VII Only	(4 Pin Lamp)

Reflector Options ▲

11	Tempered Clear Lens
14	Tempered C73 Prismatic Lens
16	Tempered Fresnel Lens
SCL	Specular Clear “Alzak” with White Flange
SGO	Specular Gold “Alzak” with White Flange
WHT	White Finish and White Flange

Options ▲

REM	Remote Emergency Battery
WL	Suitable for Wet Location

Features


Manufactured and Listed to UL 1598, ETL and CSA standards. Suitable for Damp Locations Wet location under covered ceiling Suitable for Wet Locations



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

Vantage



Luminaires

76 Community Avenue Plainfield, CT 06374
voice (860)564.4512 fax (860)564.4854
www.vantageitg.com

06/07