


Architectural Grade

Job Name _____

Type _____

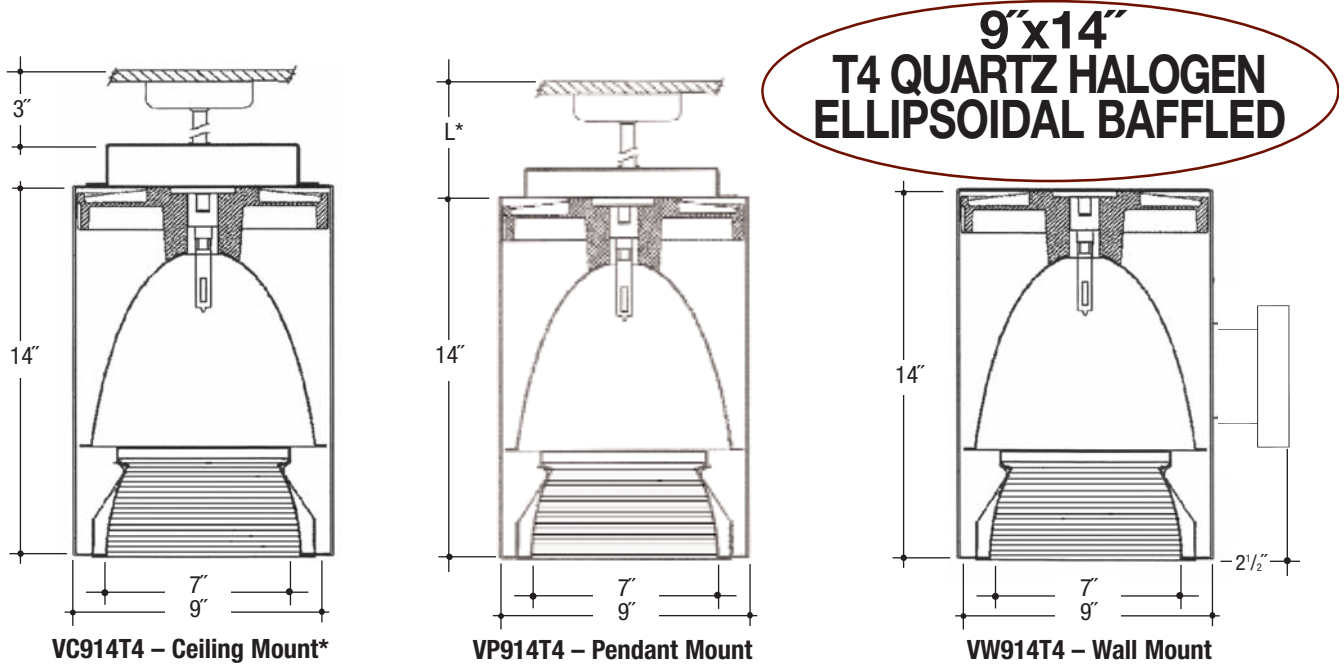

Cylinder – T4 Quartz

Catalog Number

	Wattage	Voltage	Distribution	Finish	Reflector	Options
VC914T4						
VP914T4	250W MAX.	1	N	WHT	SCL/BL	F
VW914T4	150W 100W	2	M W	BLK BZ CC	SCL/WH	PF

Note: Vantage recommends for 400 watt use, frosted OSRAM or USHIO (EYX) only, other wattages, consult factory.

***Ceiling Mount MUST have 3" Stem Kit.**

Specifications

Housing – Rolled and formed aluminum cylinder with internal heat sink. Ellipsoidal reflector spun from heavy gauge aluminum, polished and anodized for high efficiency. Design eliminated lamp image, brightness and flash. .064" extruded aluminum cylinder. Polyester powdercoat exterior finish with factory standard finishes White (WHT), Black (BLK), Bronze (BZ), Camero Silver (CS).

Socket – Cast aluminum heat sink with extruded aluminum heat sink and high heat porcelain E11 minican socket allows rapid heat transfer for maximum lamp life. 200°C high temperature wire with porcelain wire nuts at termination point.

Reflector – Heavy gauge hand spun aluminum reflector with a specular clear "Alzak" finish or baffled splay/lens holder. Rolled polished flange (Factory Standard) or flange to match cylinder color.

Pendant – Pendant mount accepts slope ceilings with a 45° swivel adjustment.

L* – Factory Standard stem length is 12".

Wall Bracket – Die-cast wall bracket attaches to steel plate mounted on 4" outlet box.

Voltage

1	120 Volts
2	277 Volts

Distribution

N	Narrow
M	Medium
W	Wide

Reflector Options ▲

SCL/BL	Specular Clear "Alzak" with Black Multi Groove Baffle
SCL/WH	Specular Clear "Alzak" with White Multi Groove Baffle

Options ▲

F	Fused
PF	High Polished Flange

Features

Manufactured and Listed to UL 1598, ETL and CSA standards.
Suitable for Damp Locations
Wet location under covered ceiling



▲ See Options and Finishes pages for a list of additional finishes and equipment.

Vantage reserves the right to change components, finishes or design details in any manner which does not alter the installed appearance or reduce performance and intended function.

08/11



76 Community Avenue Plainfield, CT 06374
voice (860) 564.4512 fax (860) 564.4854
www.vantageltg.com

VANTAGE